MATT SERIES



600X1200 PGVT&GVT (VITRIFIED) LARGEST PRODUCTION CAPACITY

Suggests Stylish Gwell crafted tiles

GLAZED VITRIFIED TILES

AATT 600X1200MM SURFACE



APPLICATION



RESIDENCES



GARDEN & POOLS



HOTELS



OFFICES



RESTAURANTS



SHOPS



AIRPORTS



MALLS



SPACES PUBLIC



RAILWAY STATIONS



BATHROOMS



KITCHENS





GLAZED VITRIFIED TILES





GLAZED VITRIFIED TILES



ALCORA CREMA



GLAZED VITRIFIED TILES



ALCORA GRIS



GLAZED VITRIFIED TILES

FINISH: MATT



ANTONY CREMA



GLAZED VITRIFIED TILES






GLAZED VITRIFIED TILES






GLAZED VITRIFIED TILES

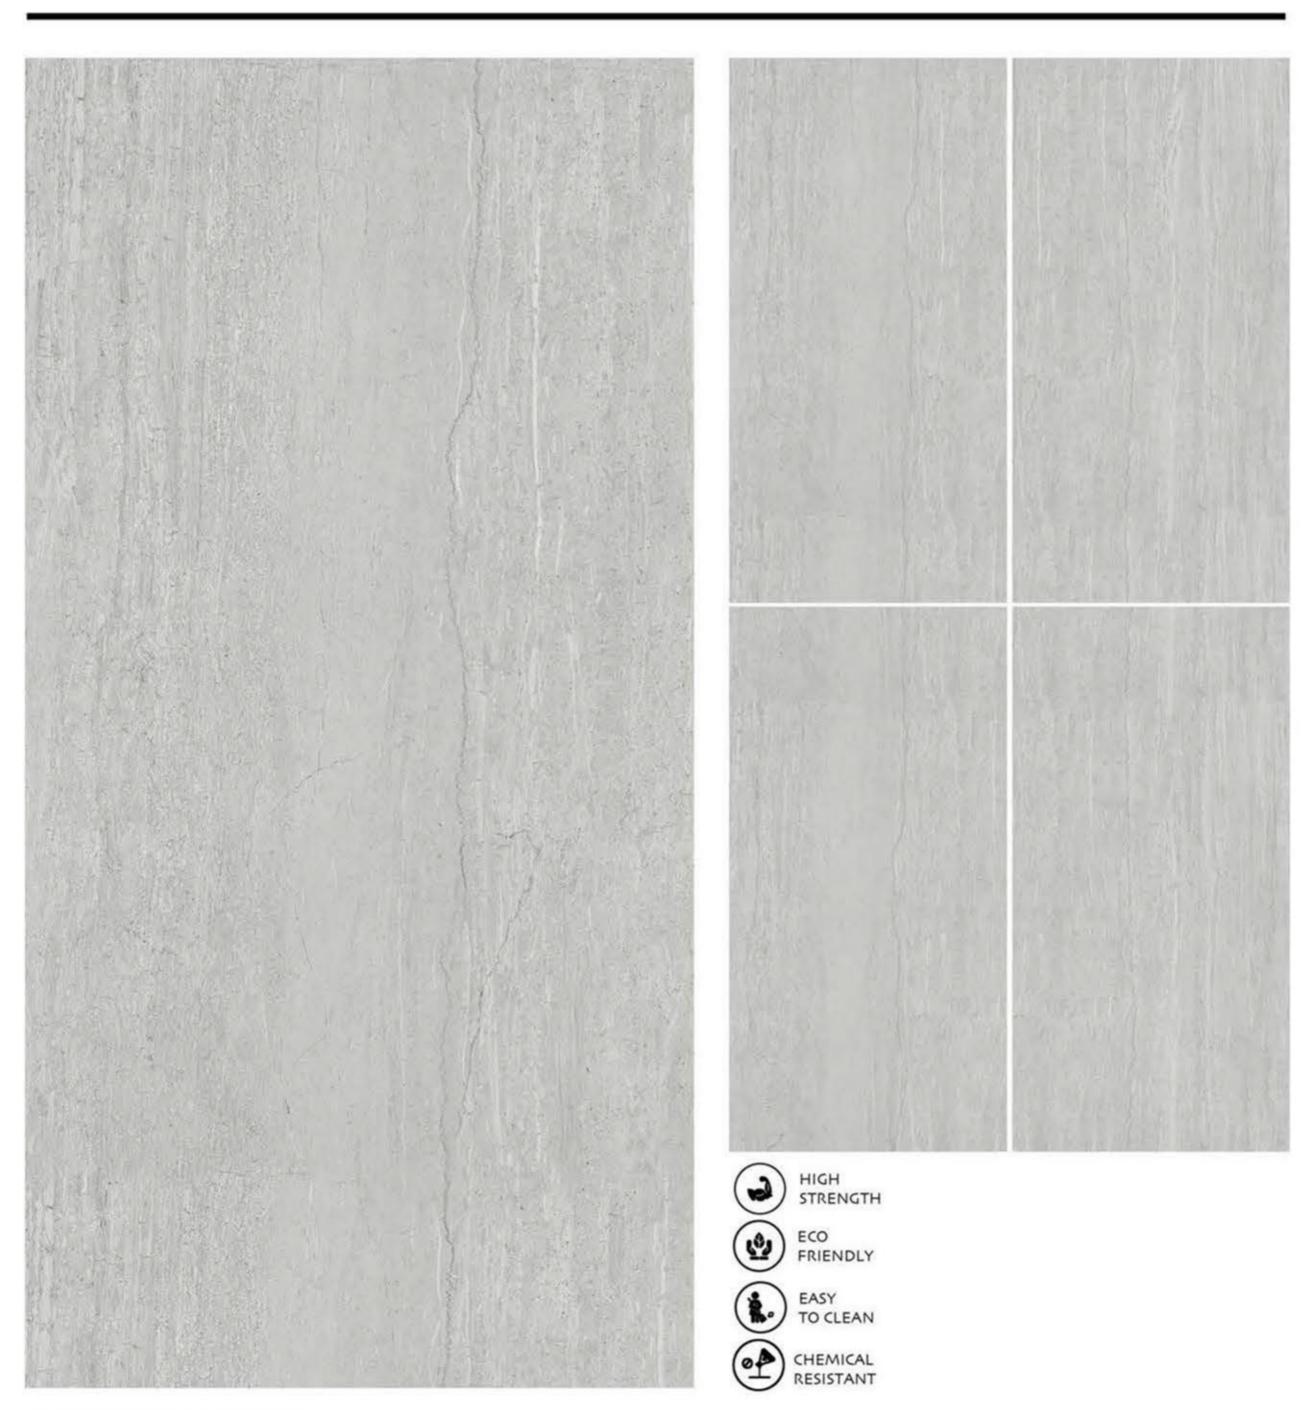




GLAZED VITRIFIED TILES

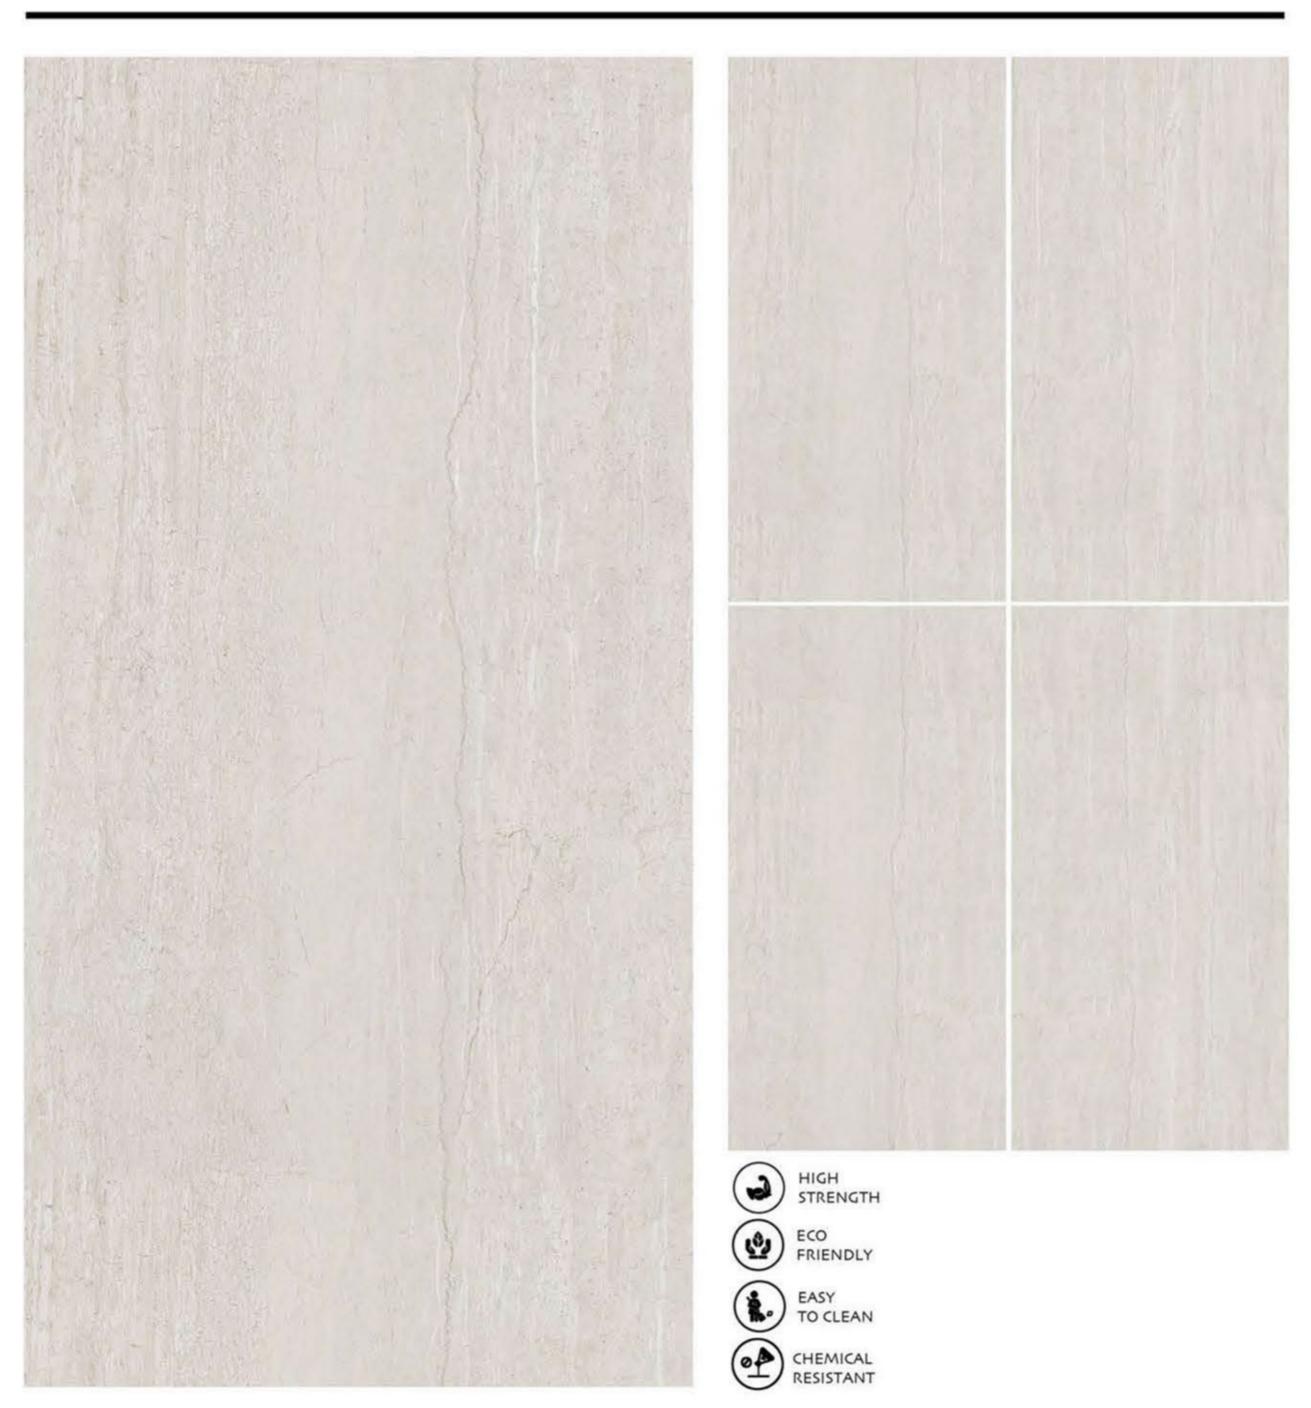




GLAZED VITRIFIED TILES

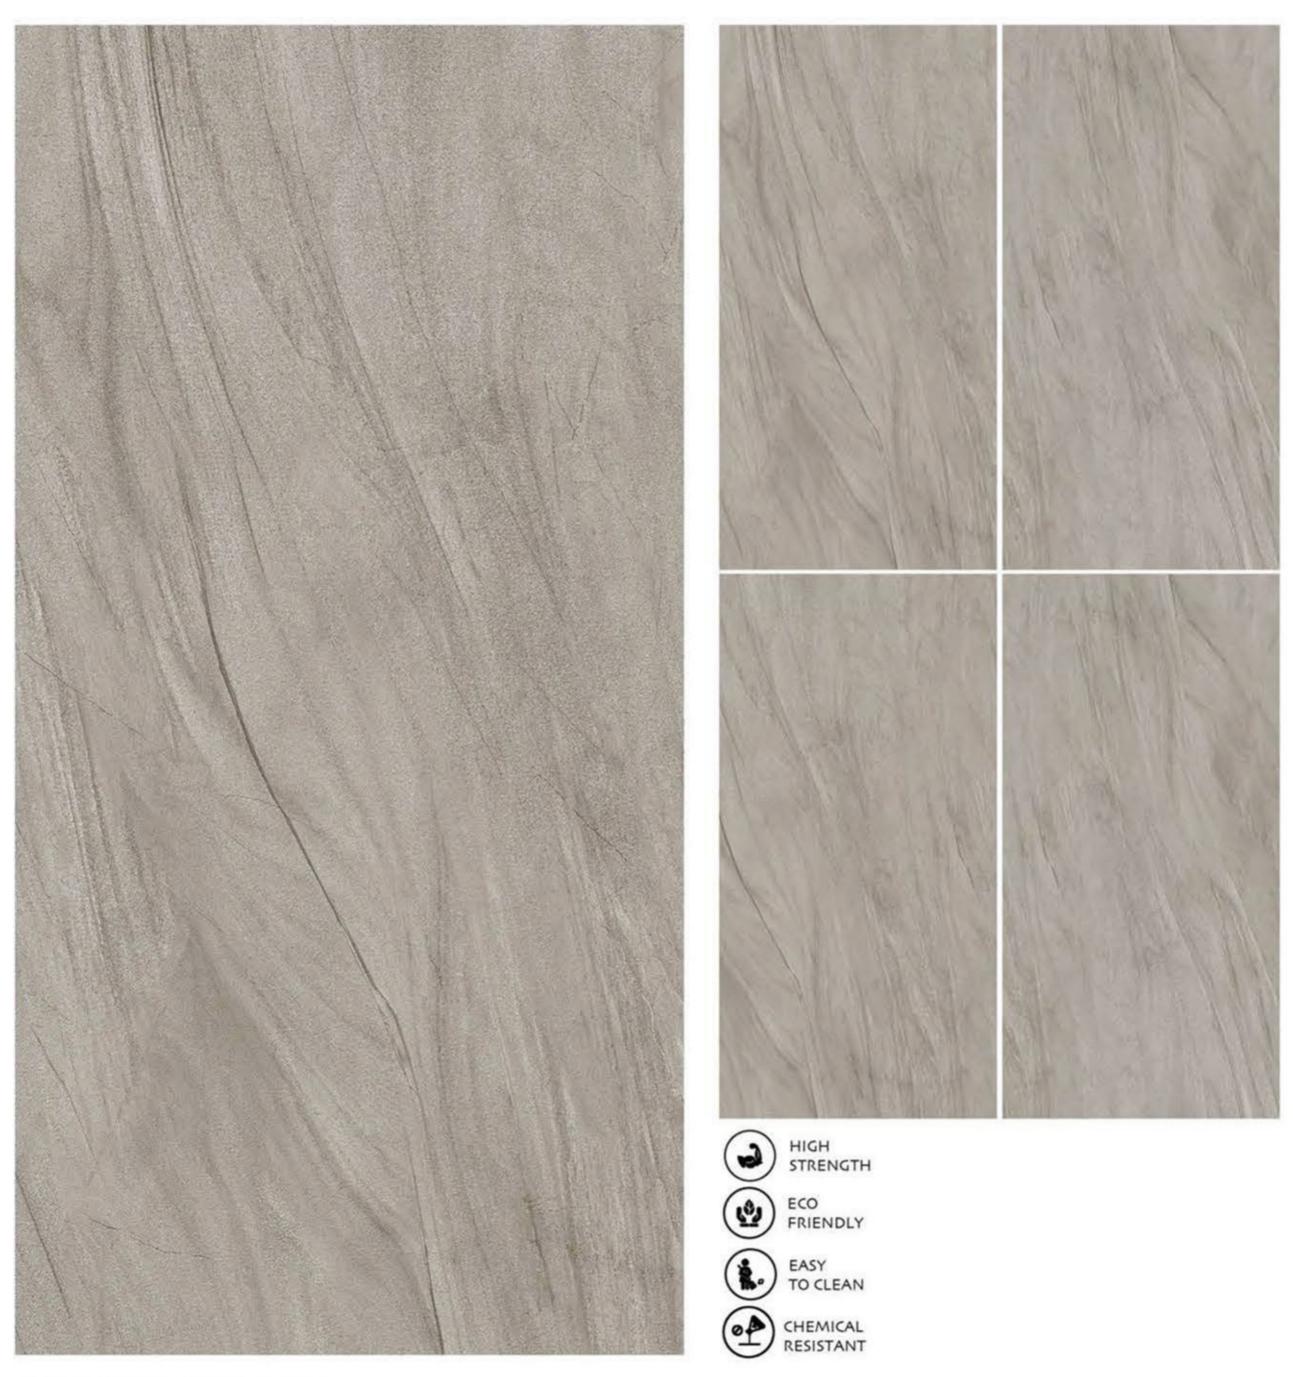

ARAGONITE ASH



GLAZED VITRIFIED TILES

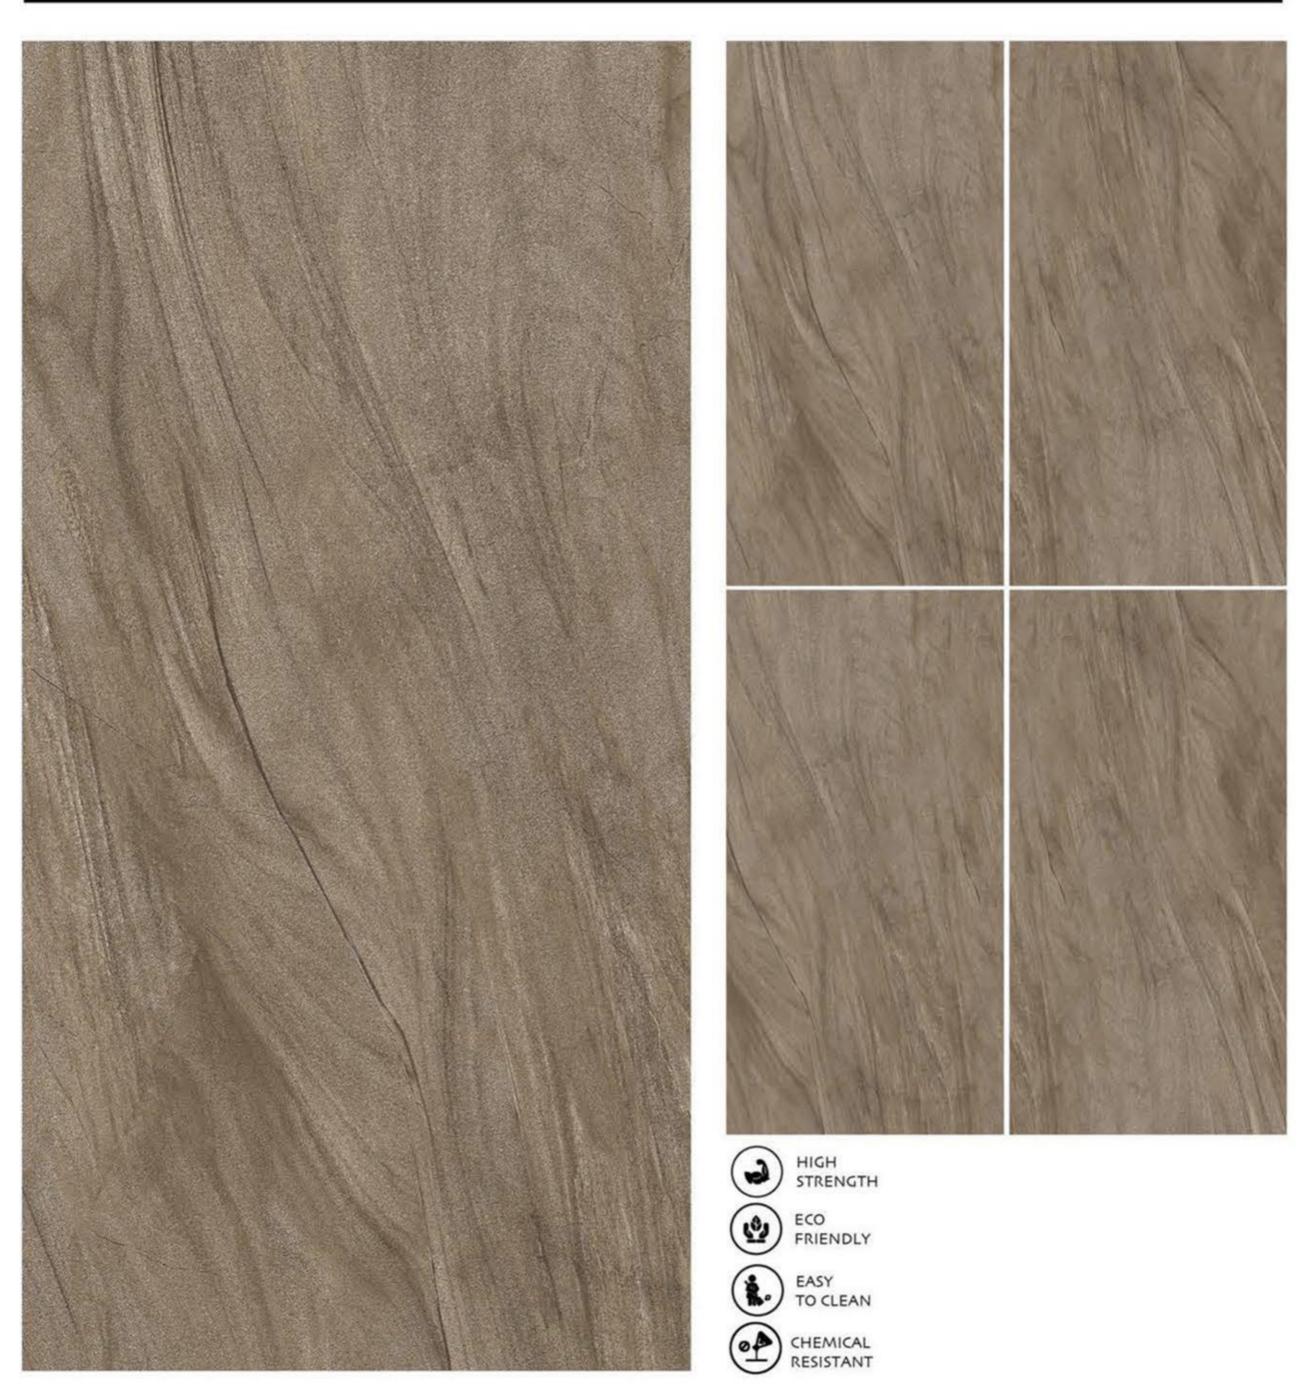

ARAGONITE BRONZE




GLAZED VITRIFIED TILES



ARAGONITE FAWN




GLAZED VITRIFIED TILES

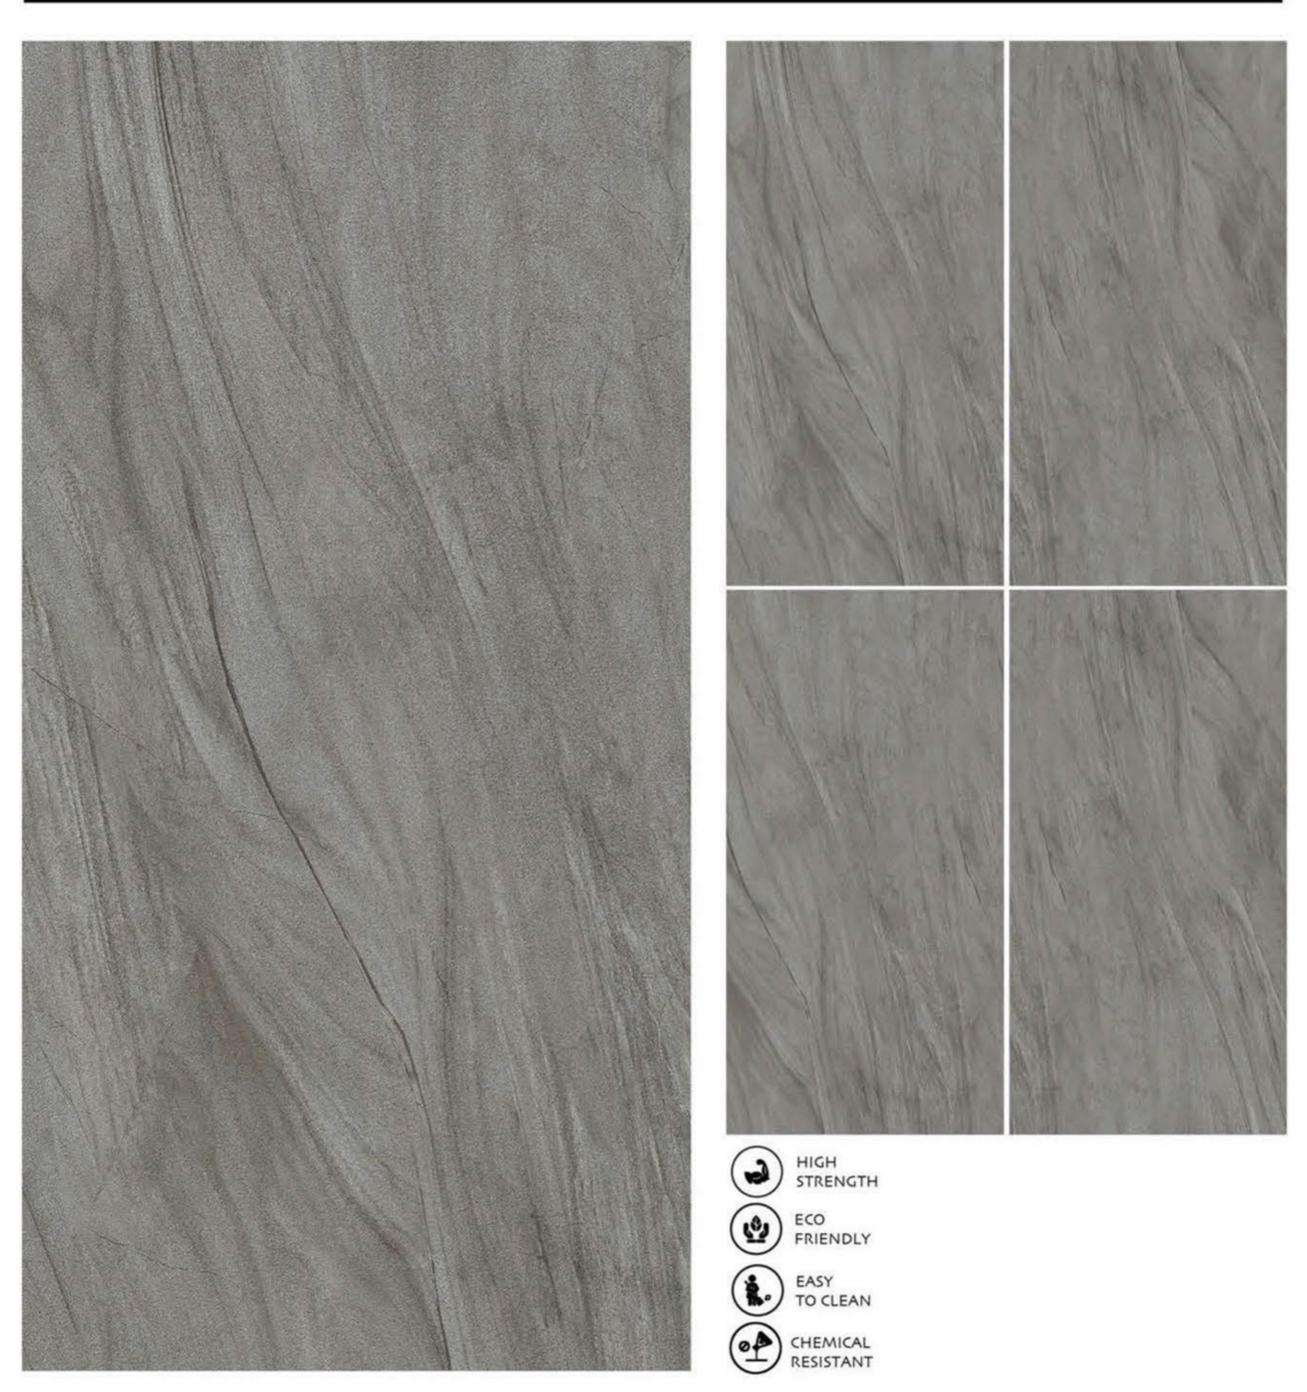

ARAGONITE TAUPE




GLAZED VITRIFIED TILES

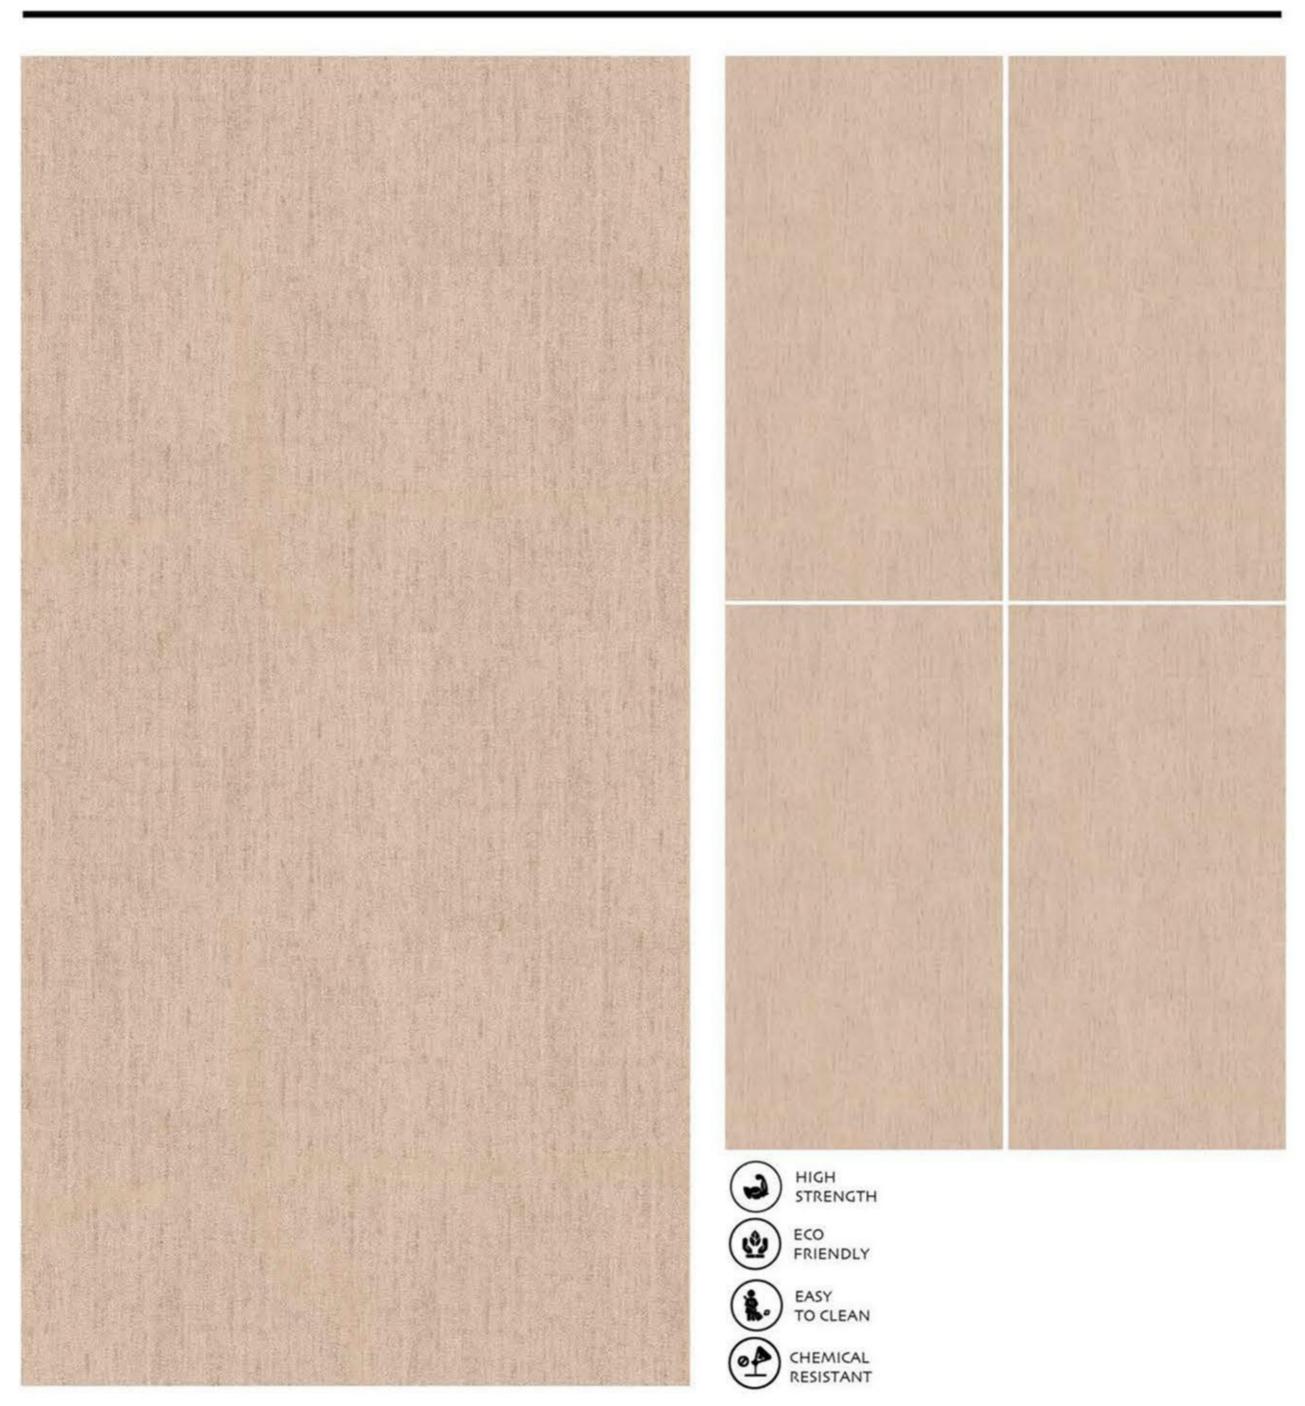




GLAZED VITRIFIED TILES

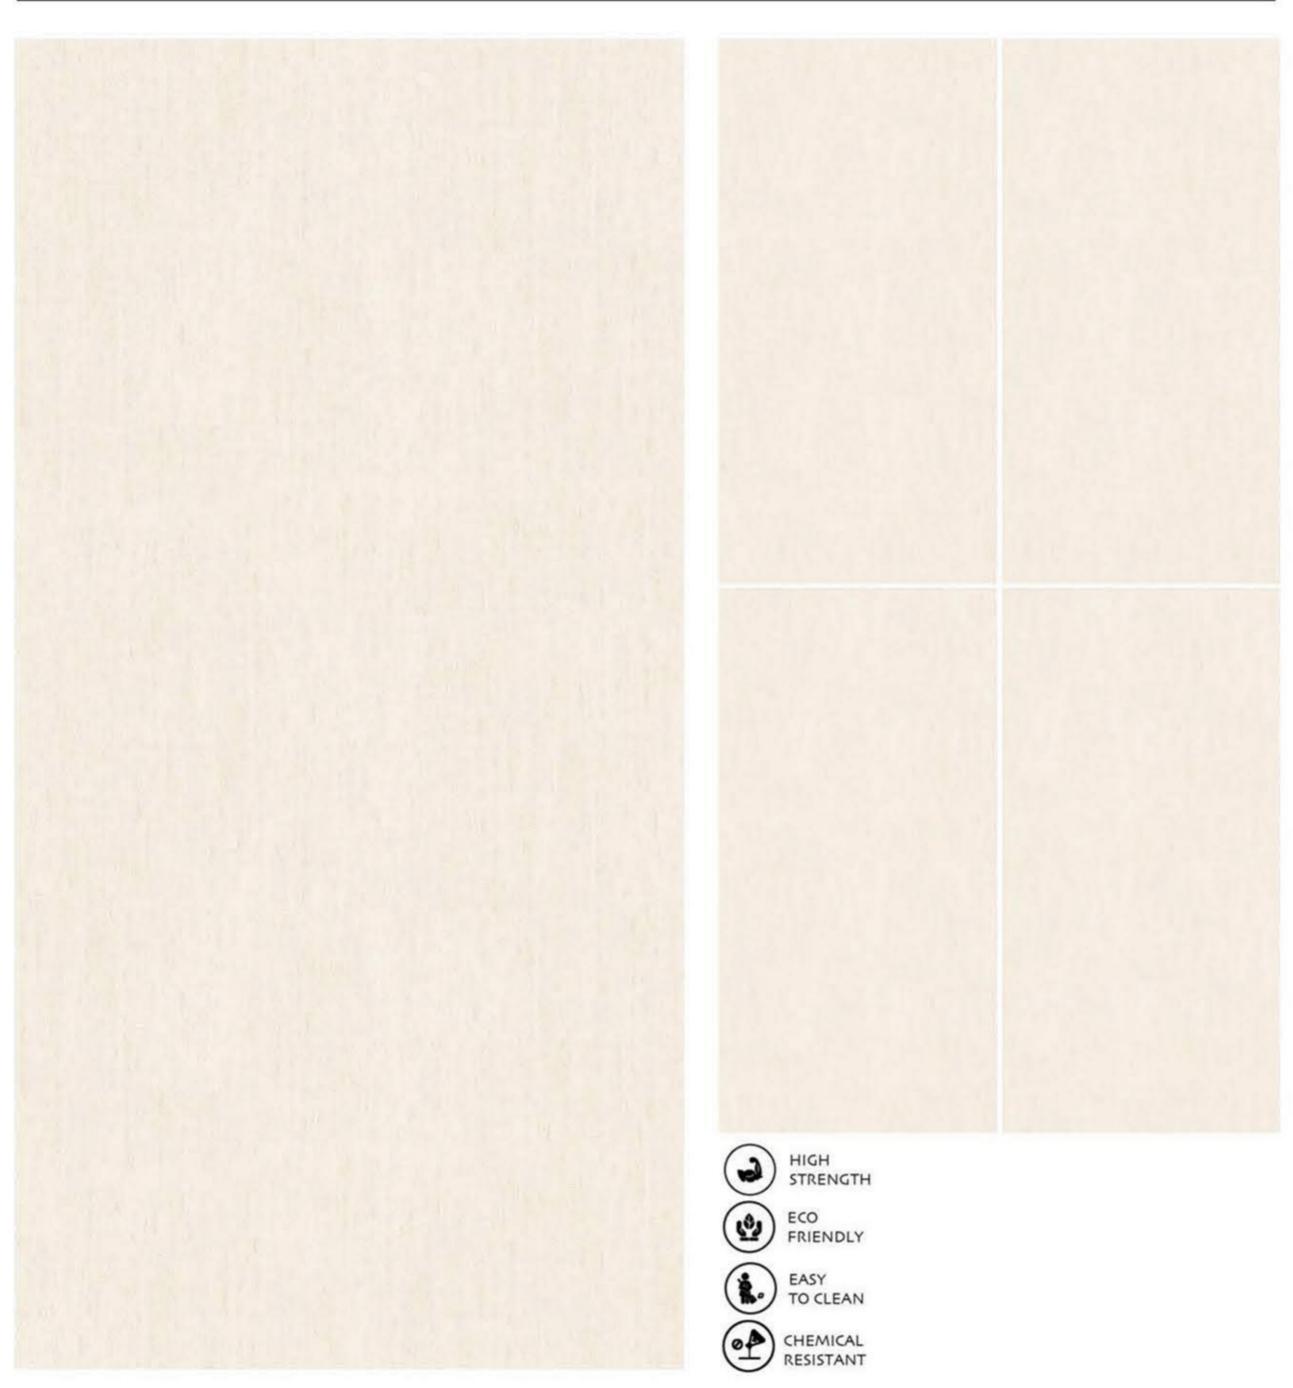




GLAZED VITRIFIED TILES

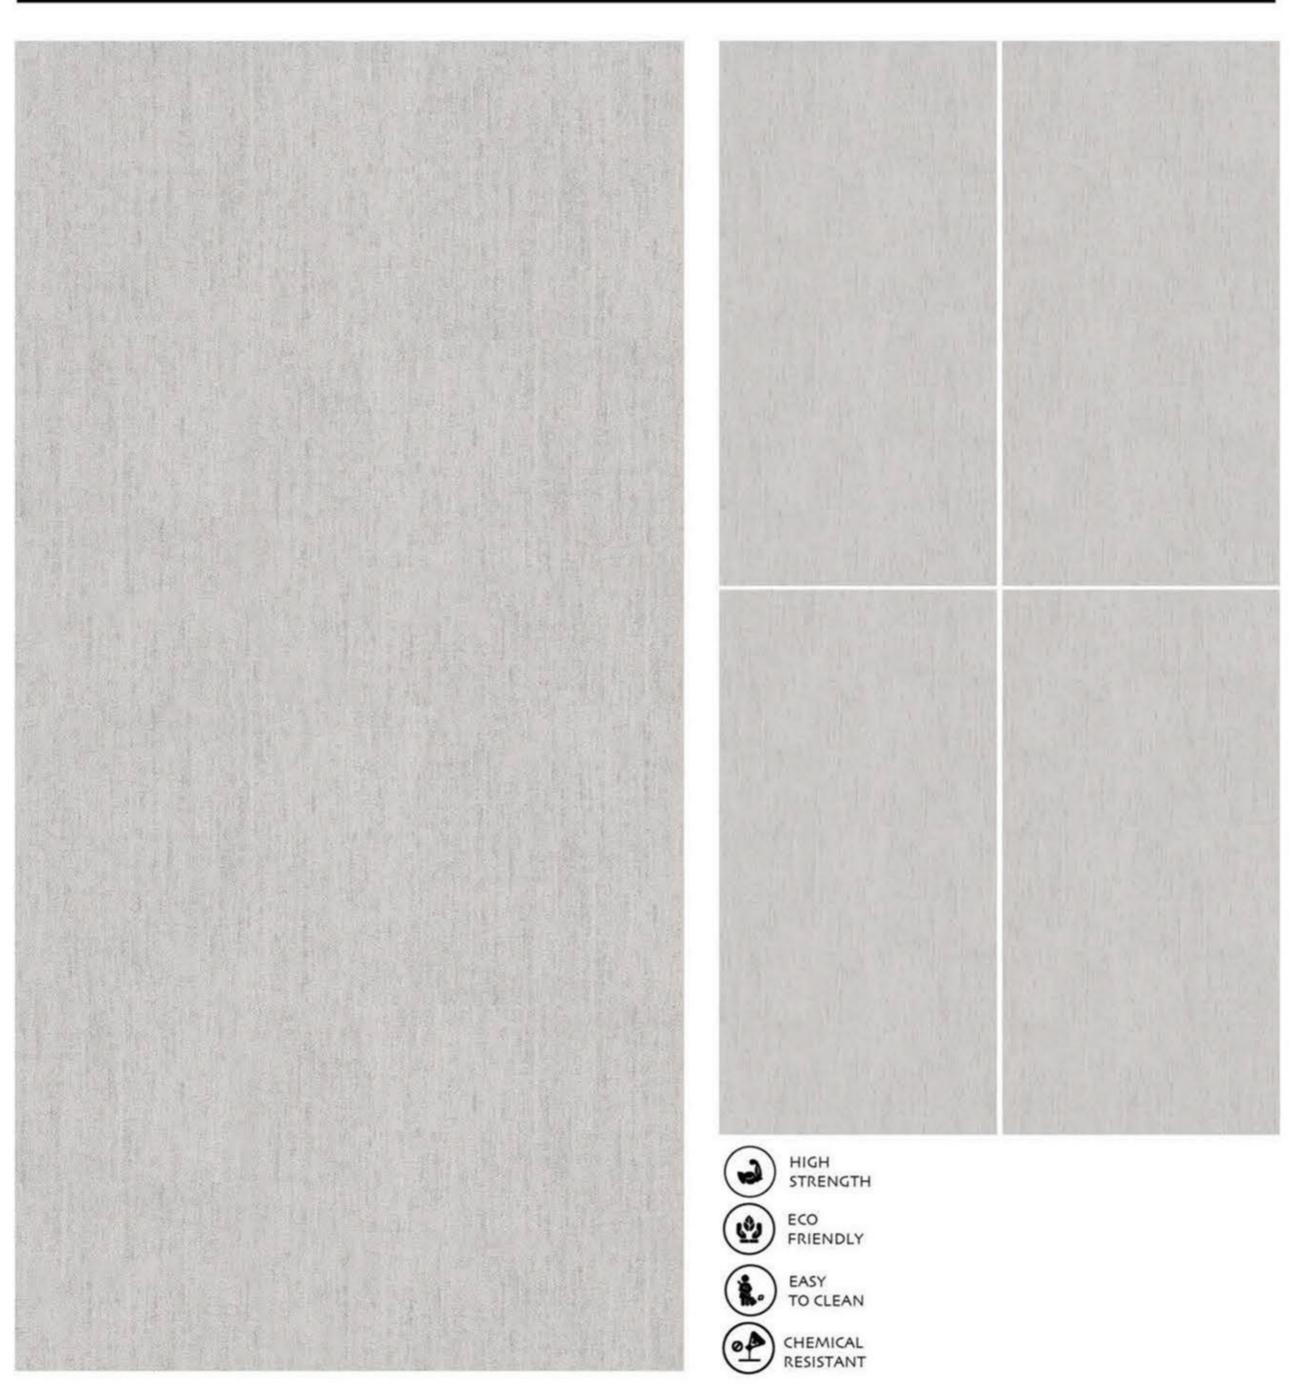




GLAZED VITRIFIED TILES

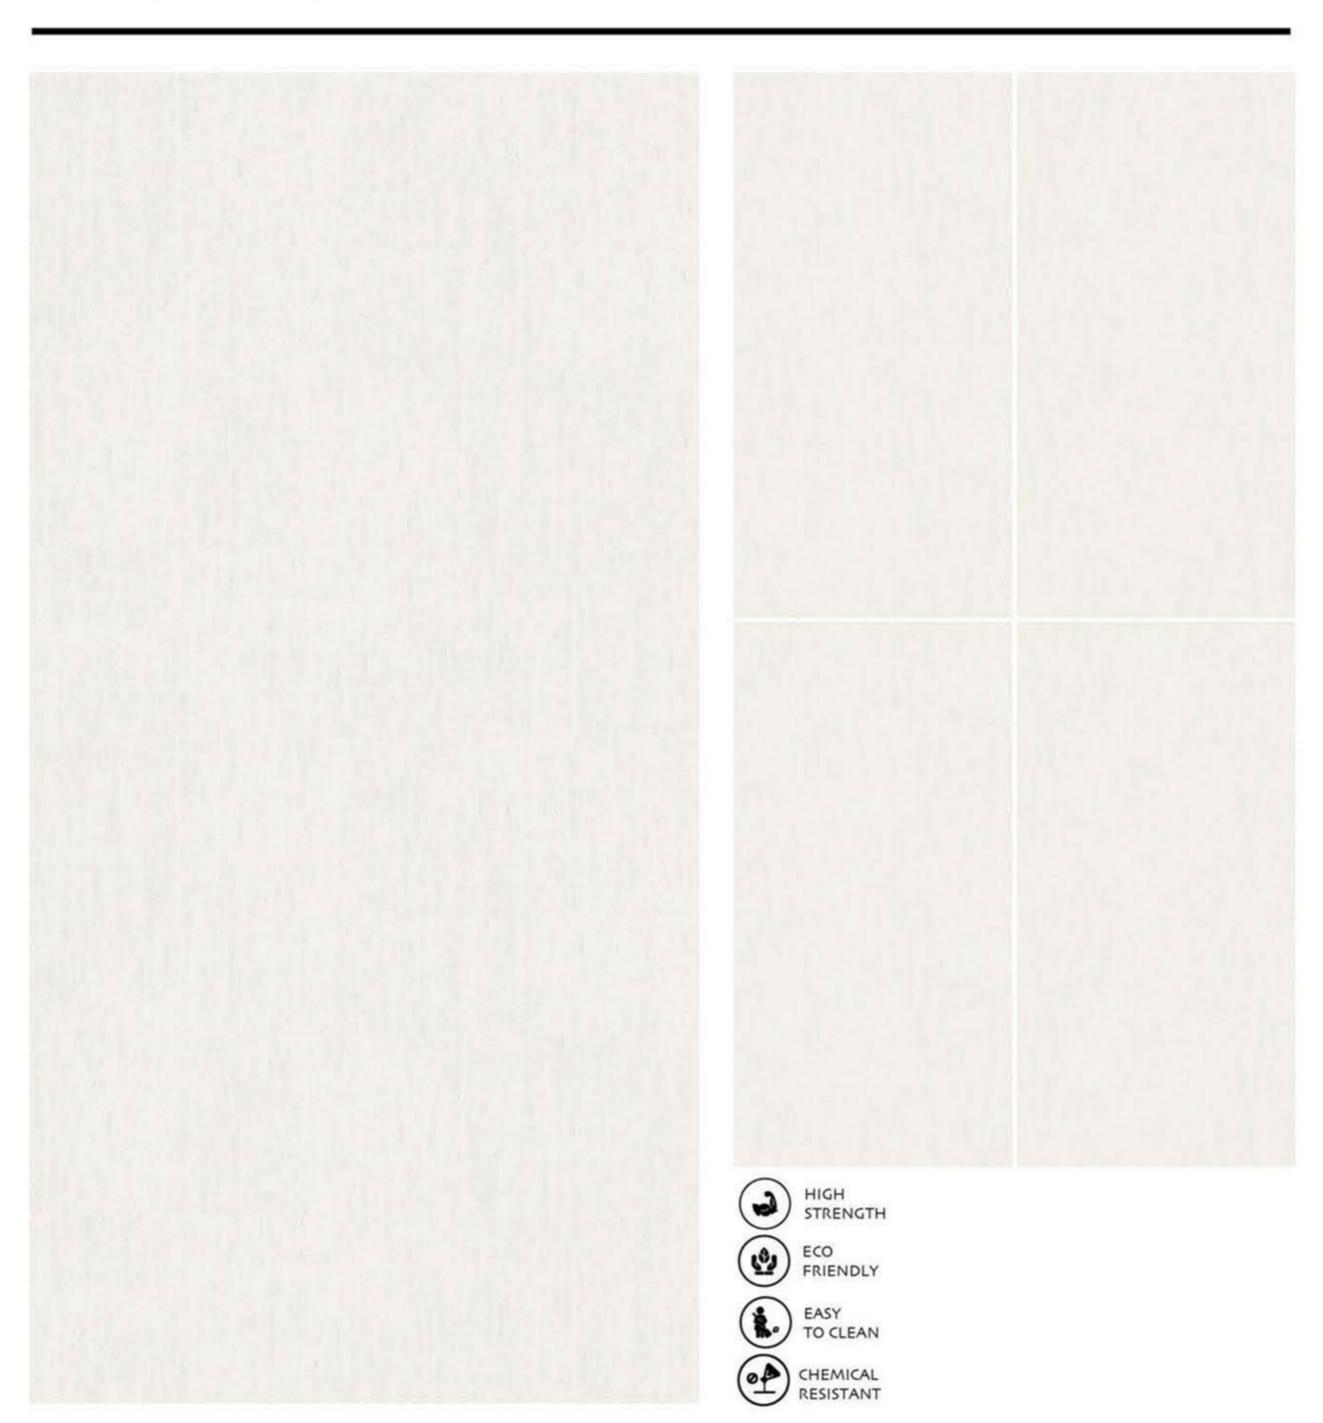



GLAZED VITRIFIED TILES

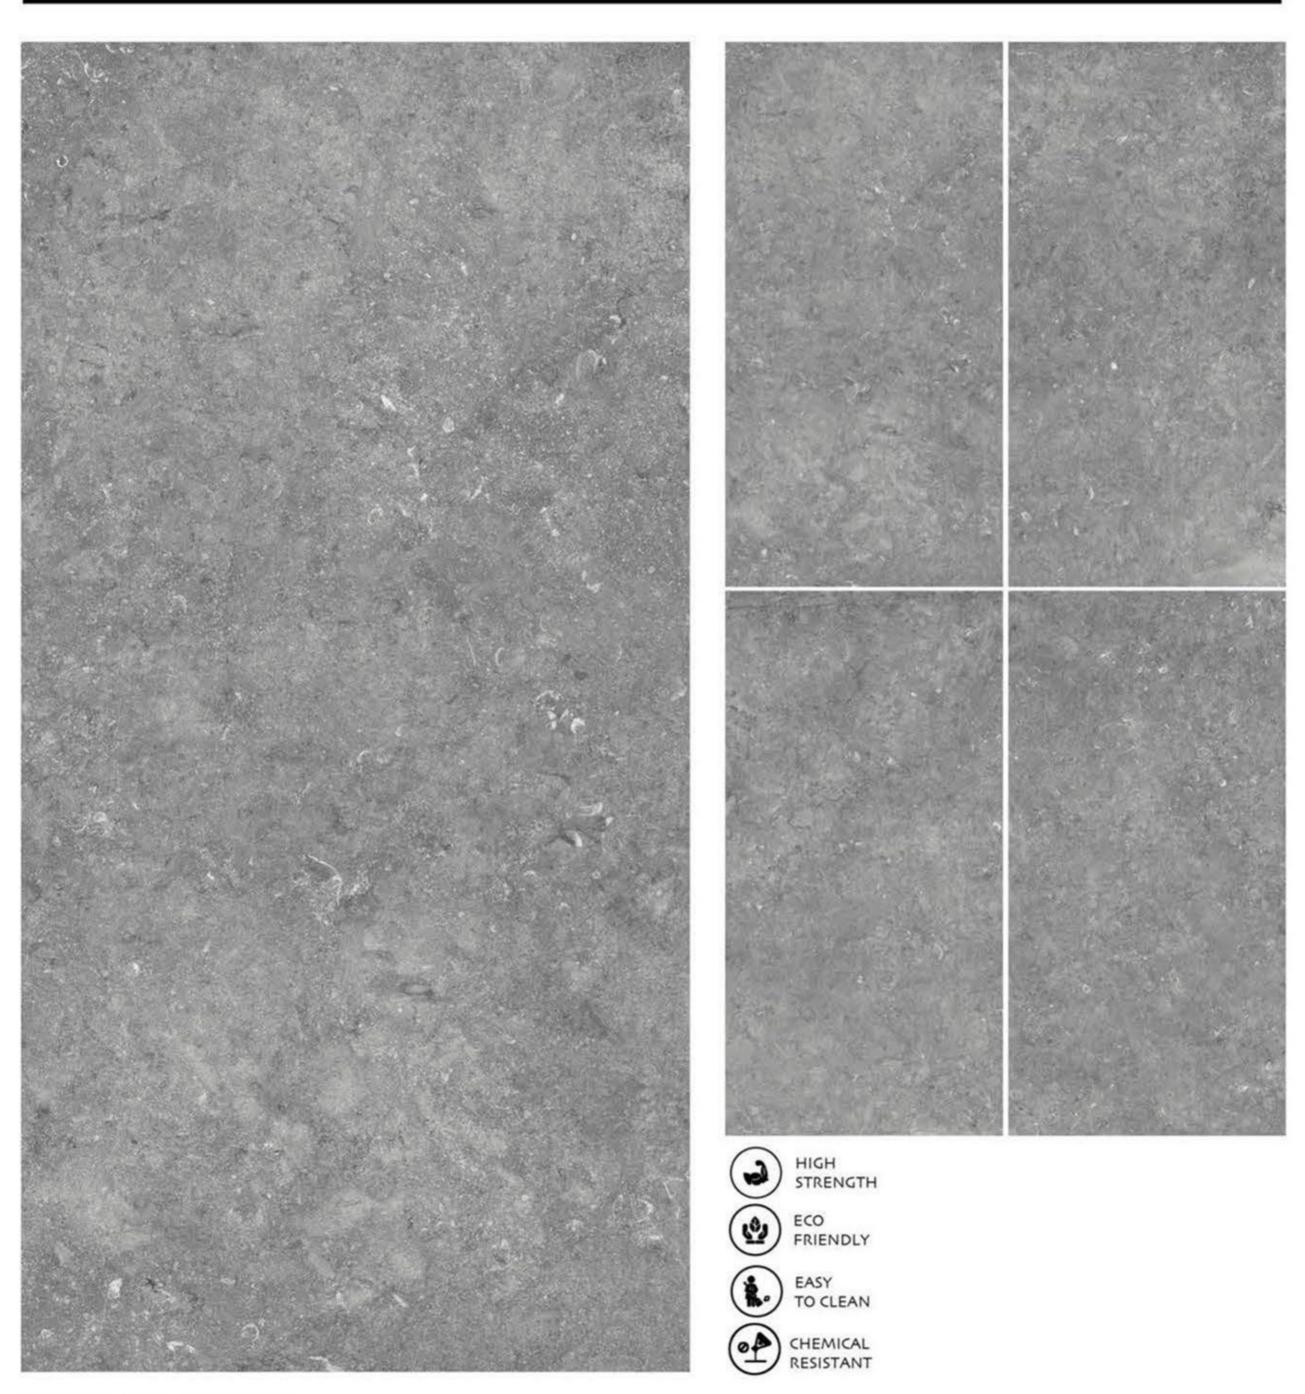

BERLIN NERO



GLAZED VITRIFIED TILES


FINISH: MATT



BERLIN SILVER




GLAZED VITRIFIED TILES

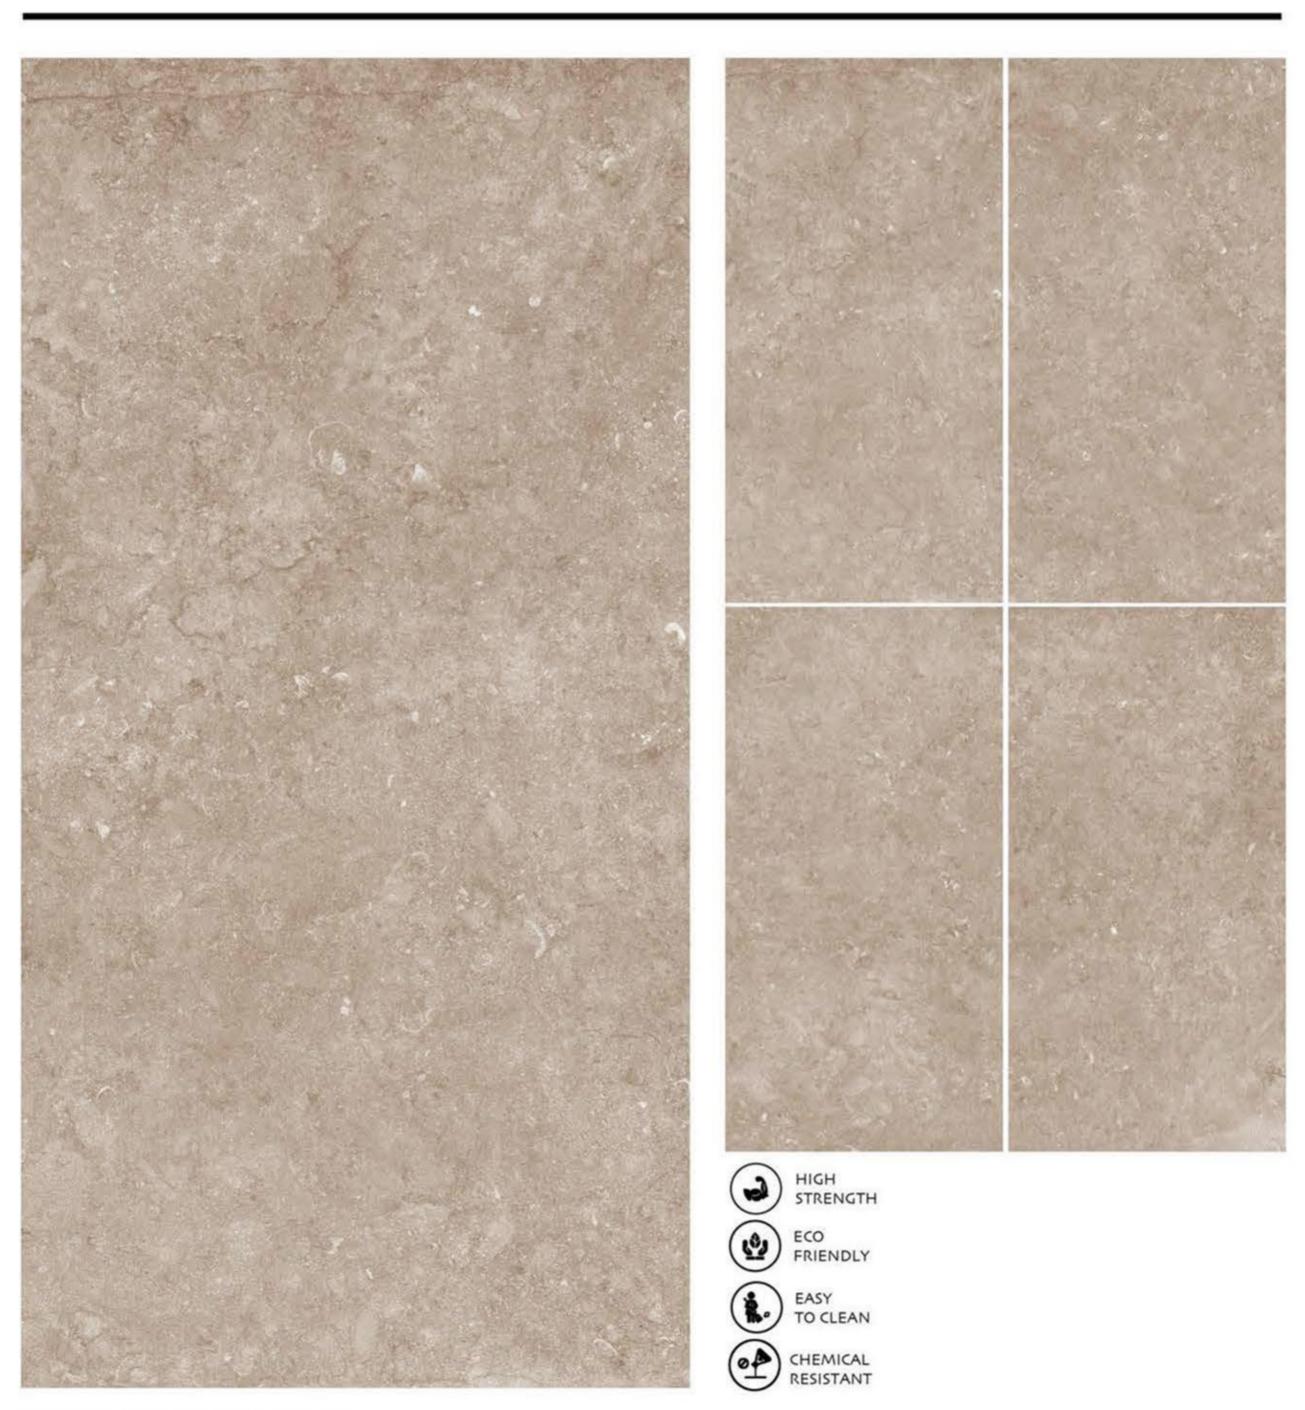

BERLIN NATURAL




GLAZED VITRIFIED TILES

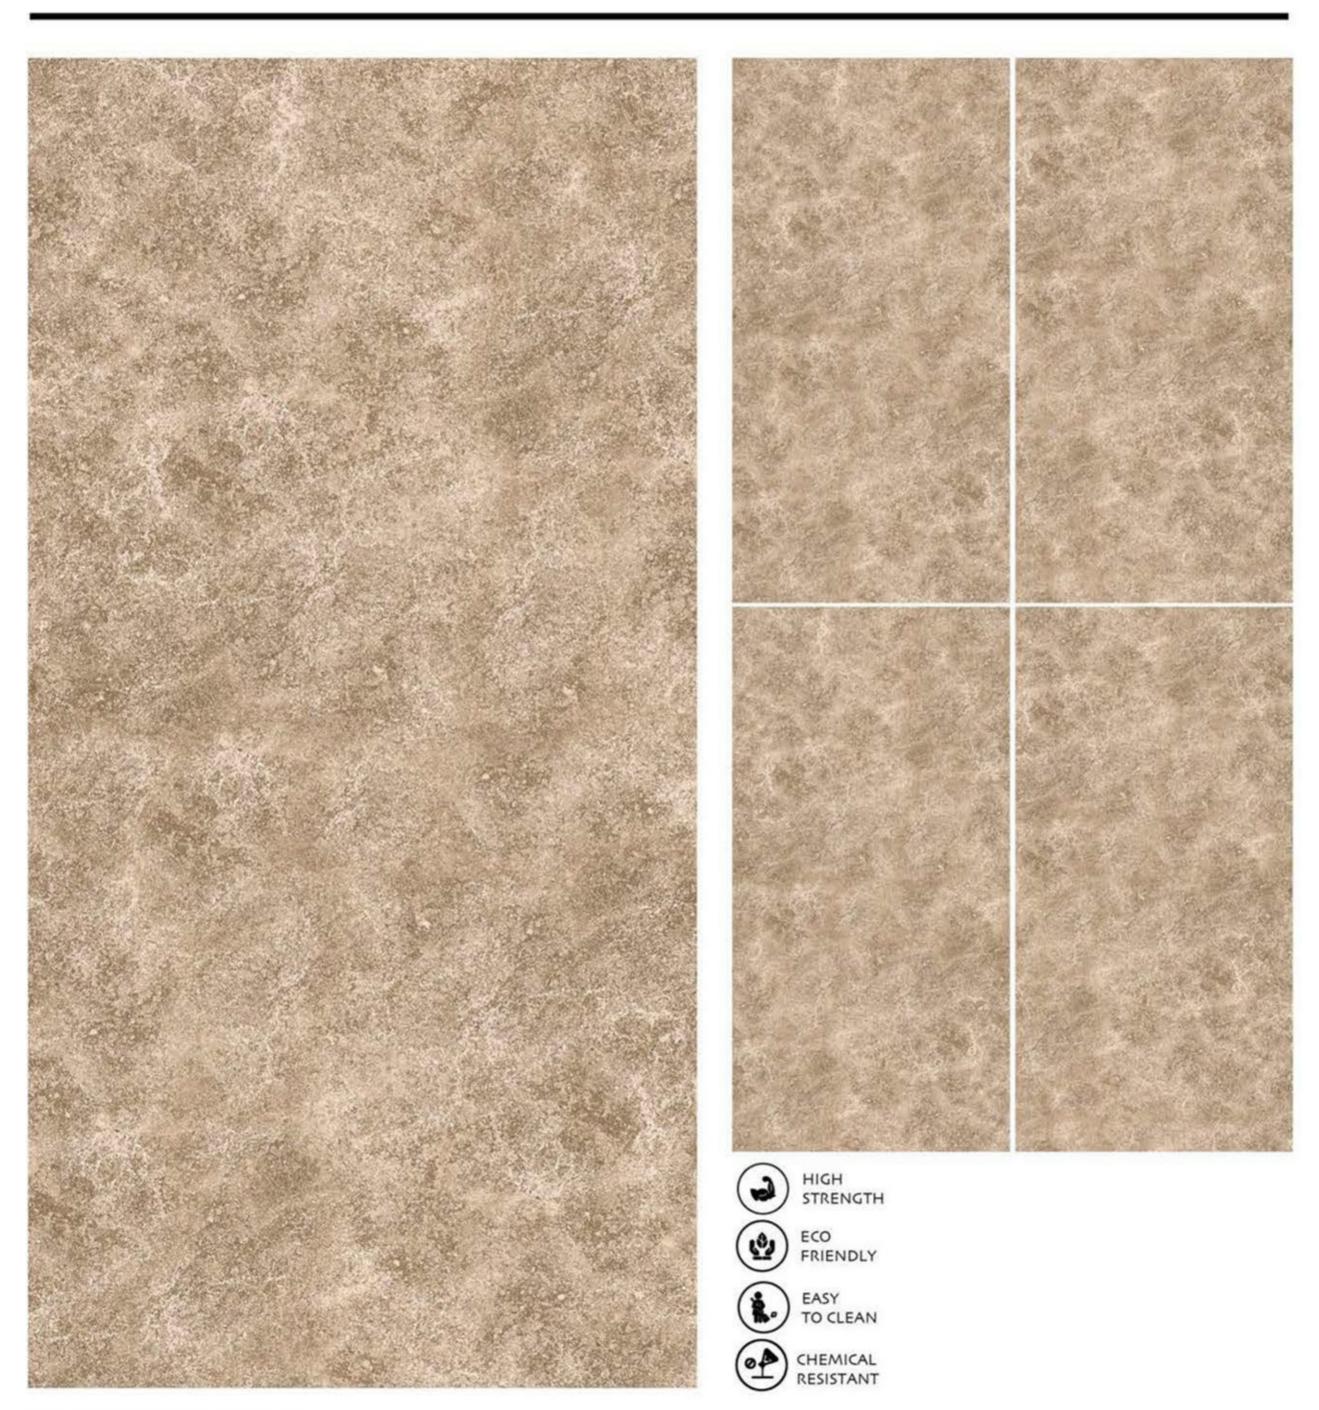




GLAZED VITRIFIED TILES

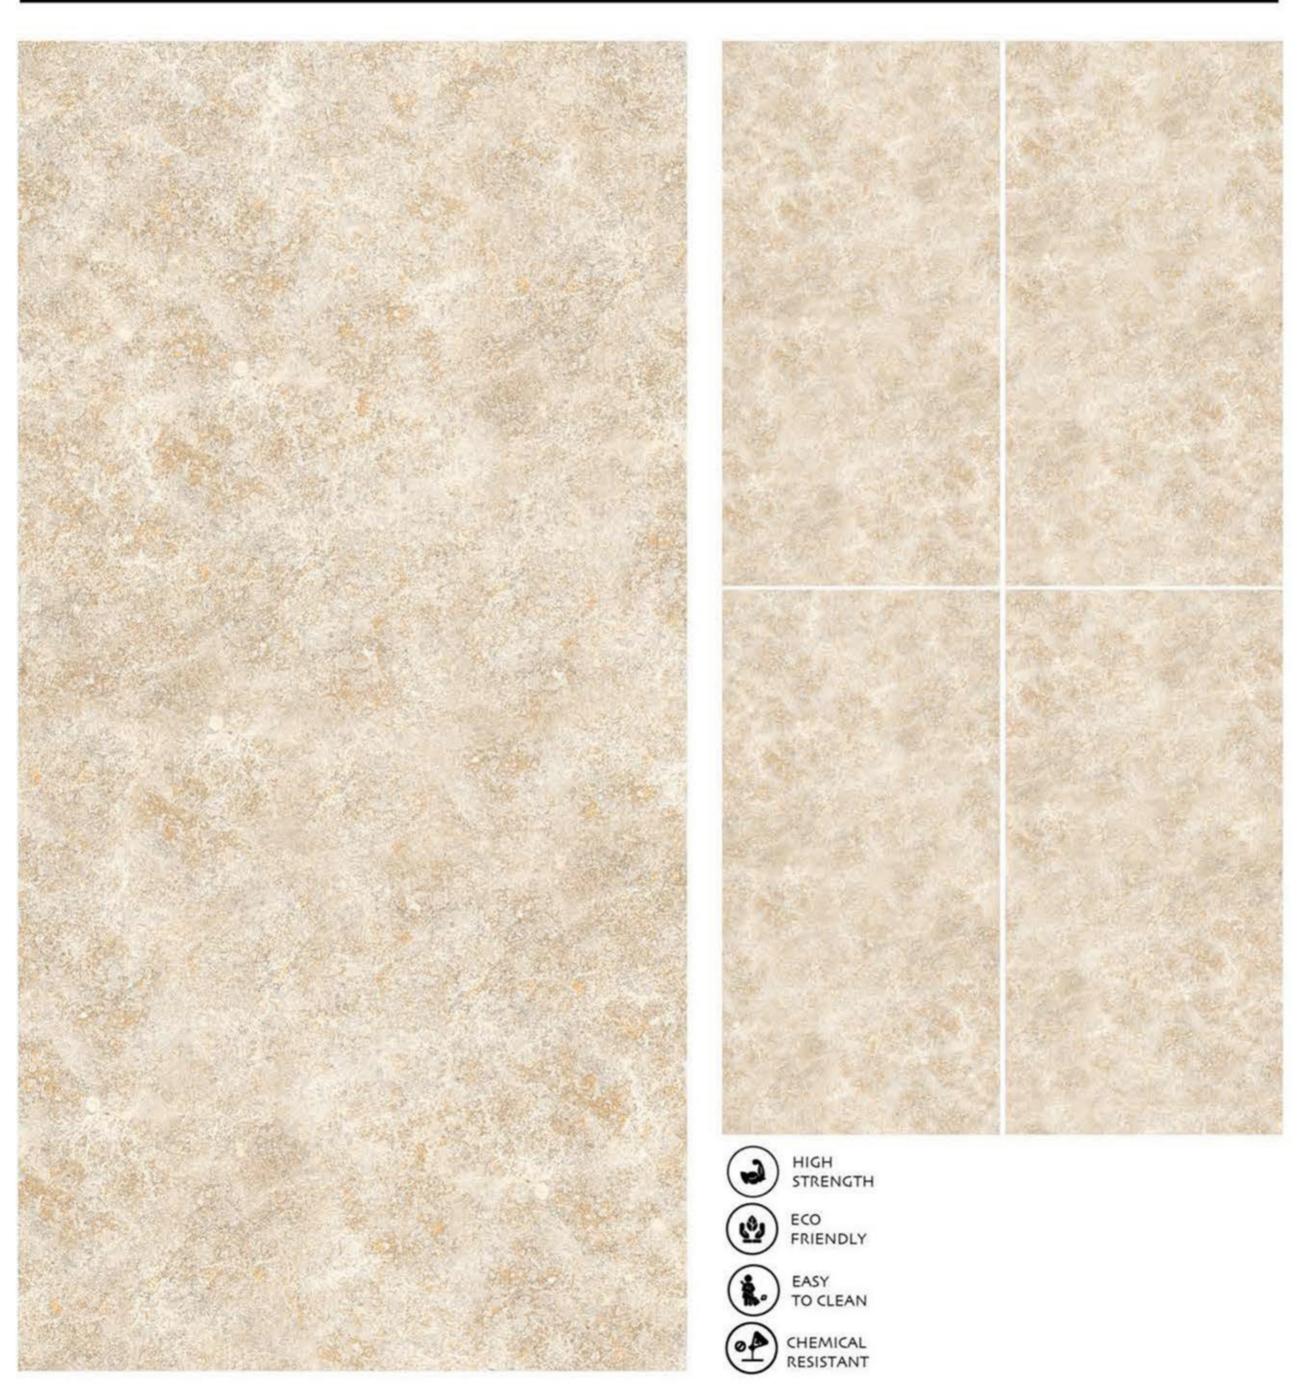




GLAZED VITRIFIED TILES

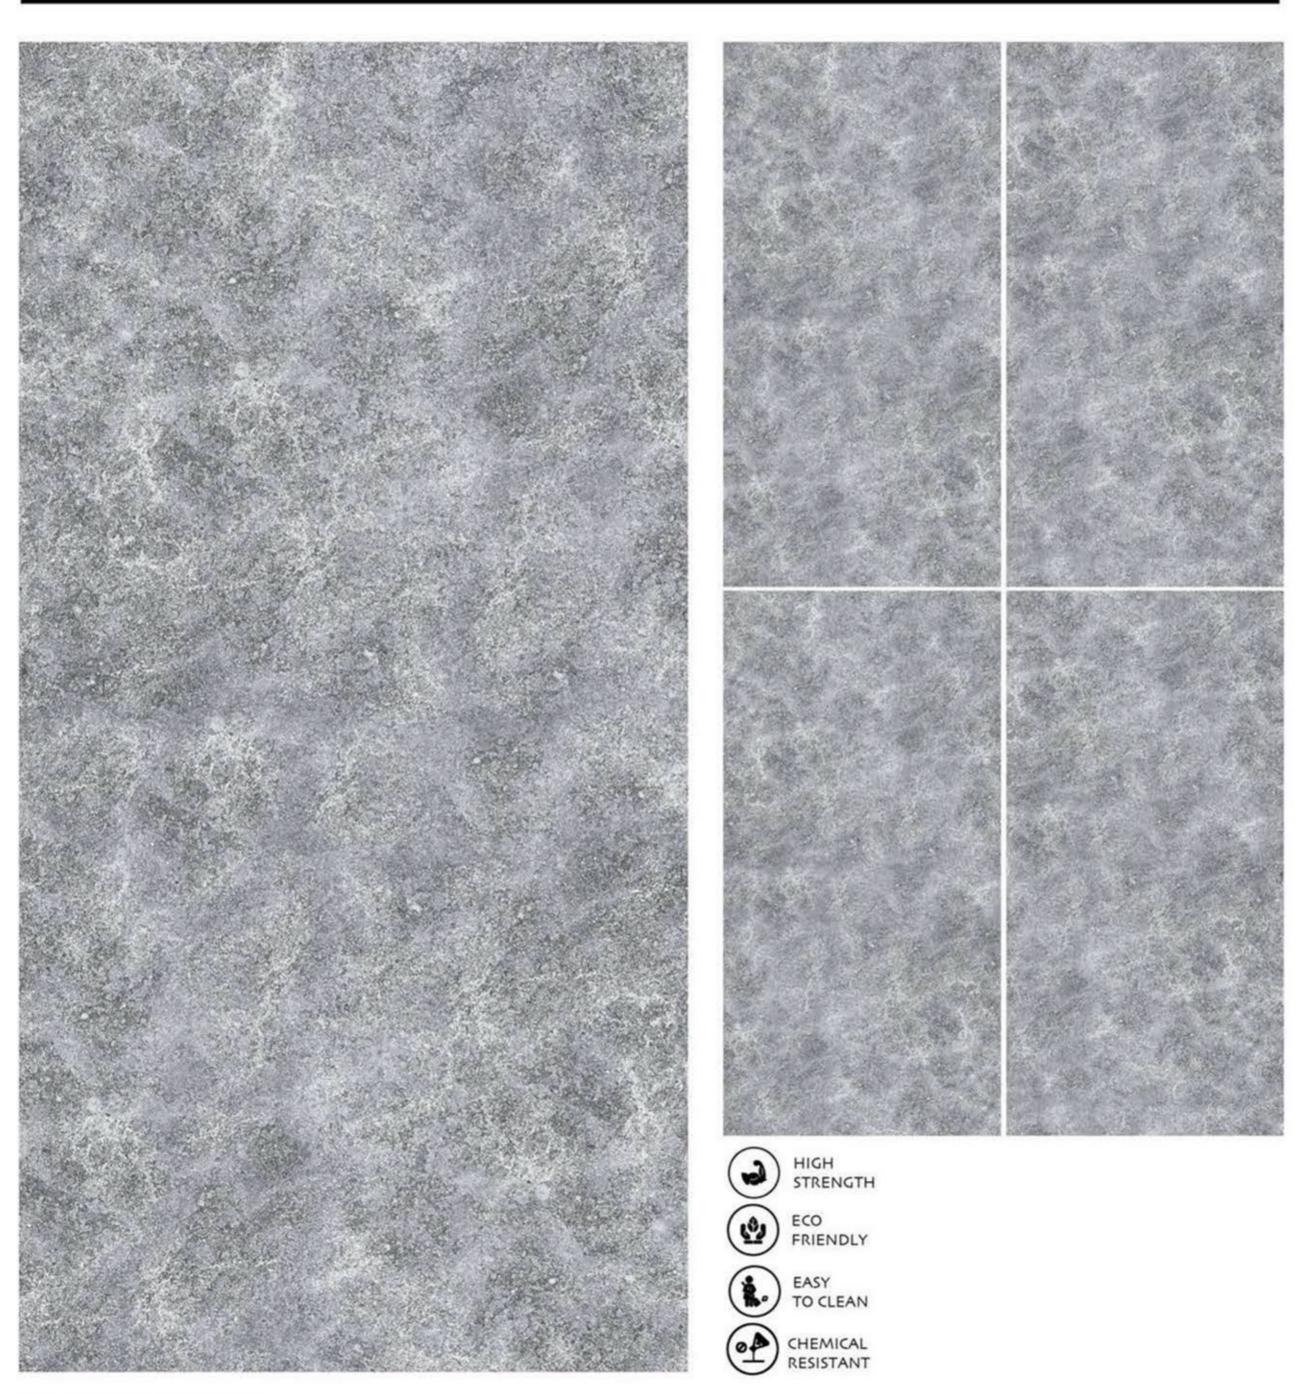

BURLY GREY



GLAZED VITRIFIED TILES

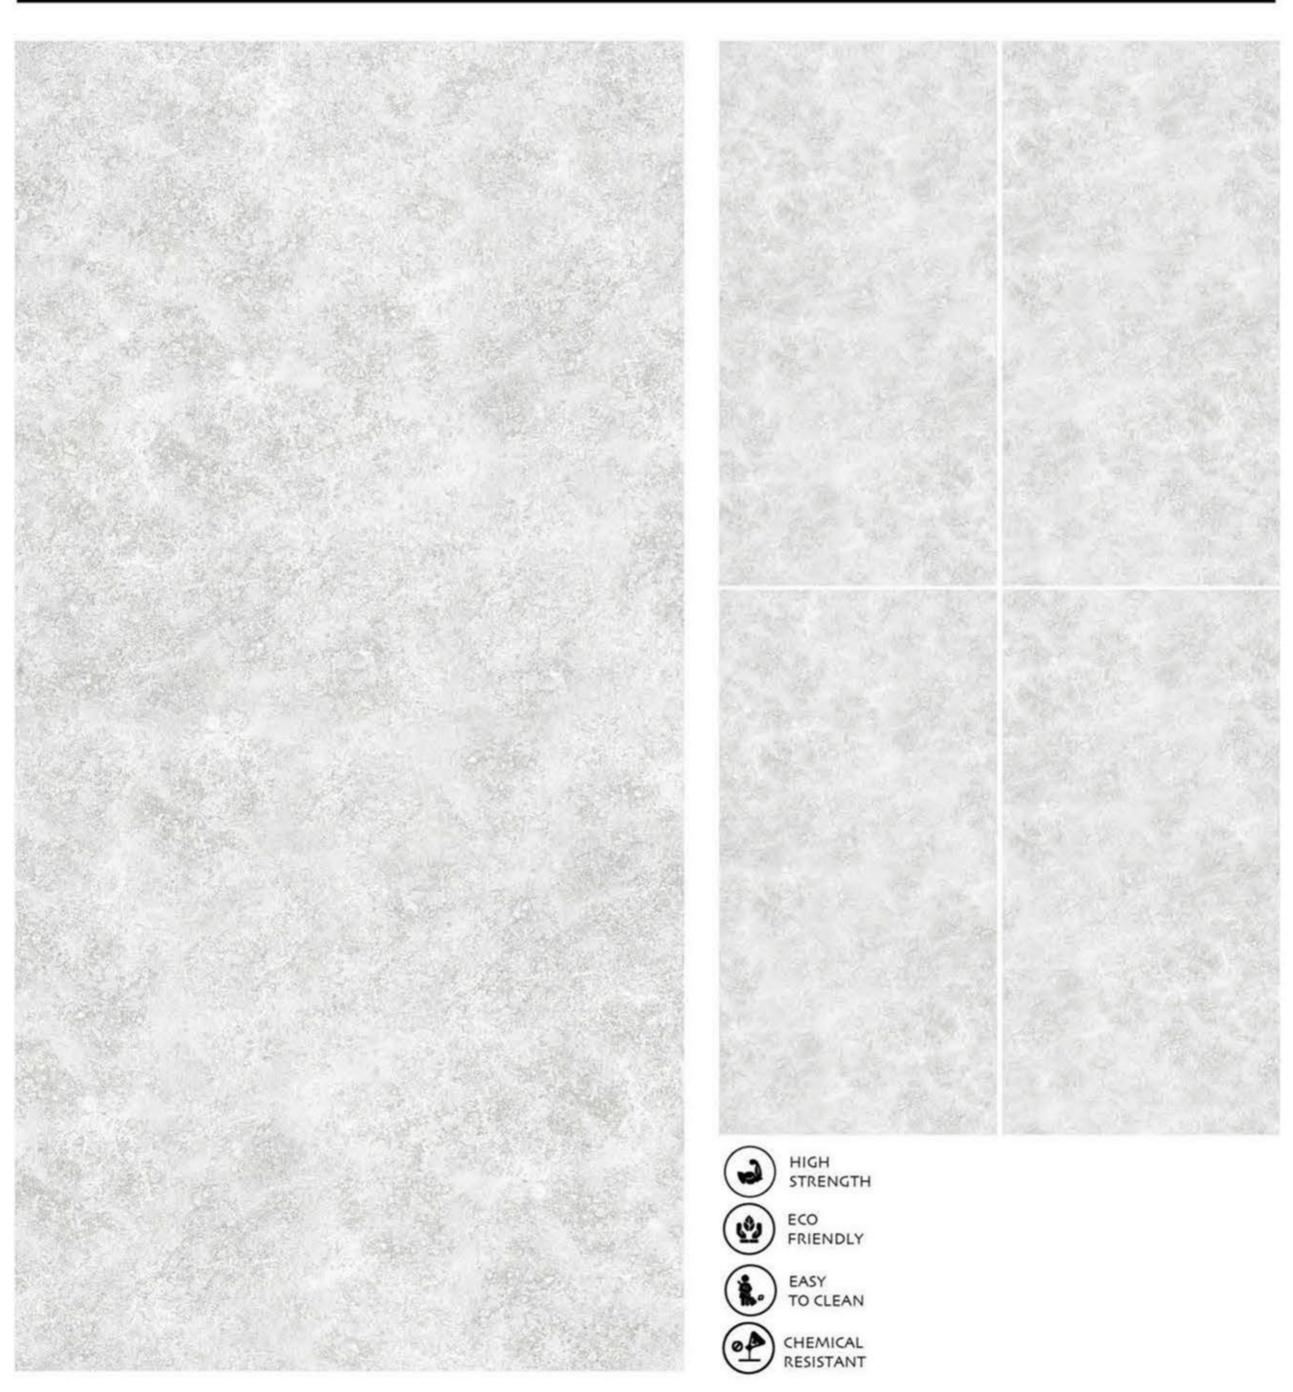



GLAZED VITRIFIED TILES

FINISH: MATT



CLARITO BEIGE



GLAZED VITRIFIED TILES


FINISH: MATT



CLARITO LITE



GLAZED VITRIFIED TILES

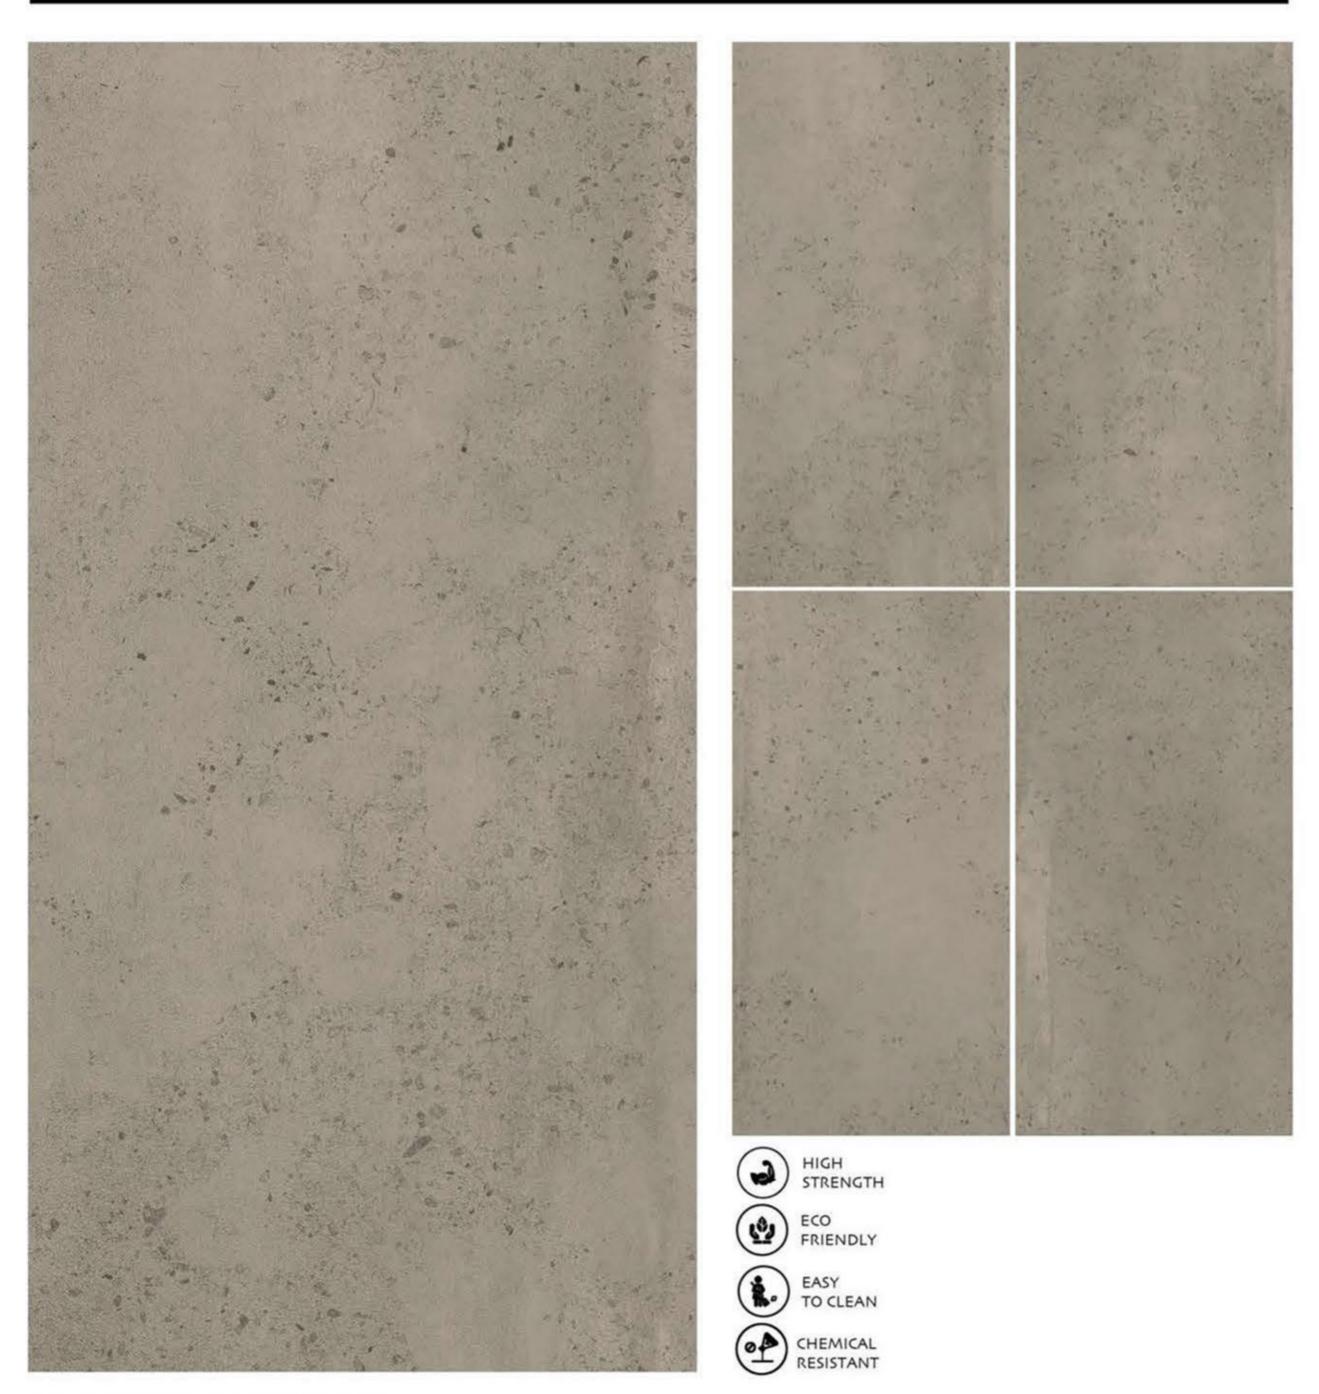

CLARITO NATURAL




GLAZED
VITRIFIED TILES





GLAZED VITRIFIED TILES

FINISH: MATT

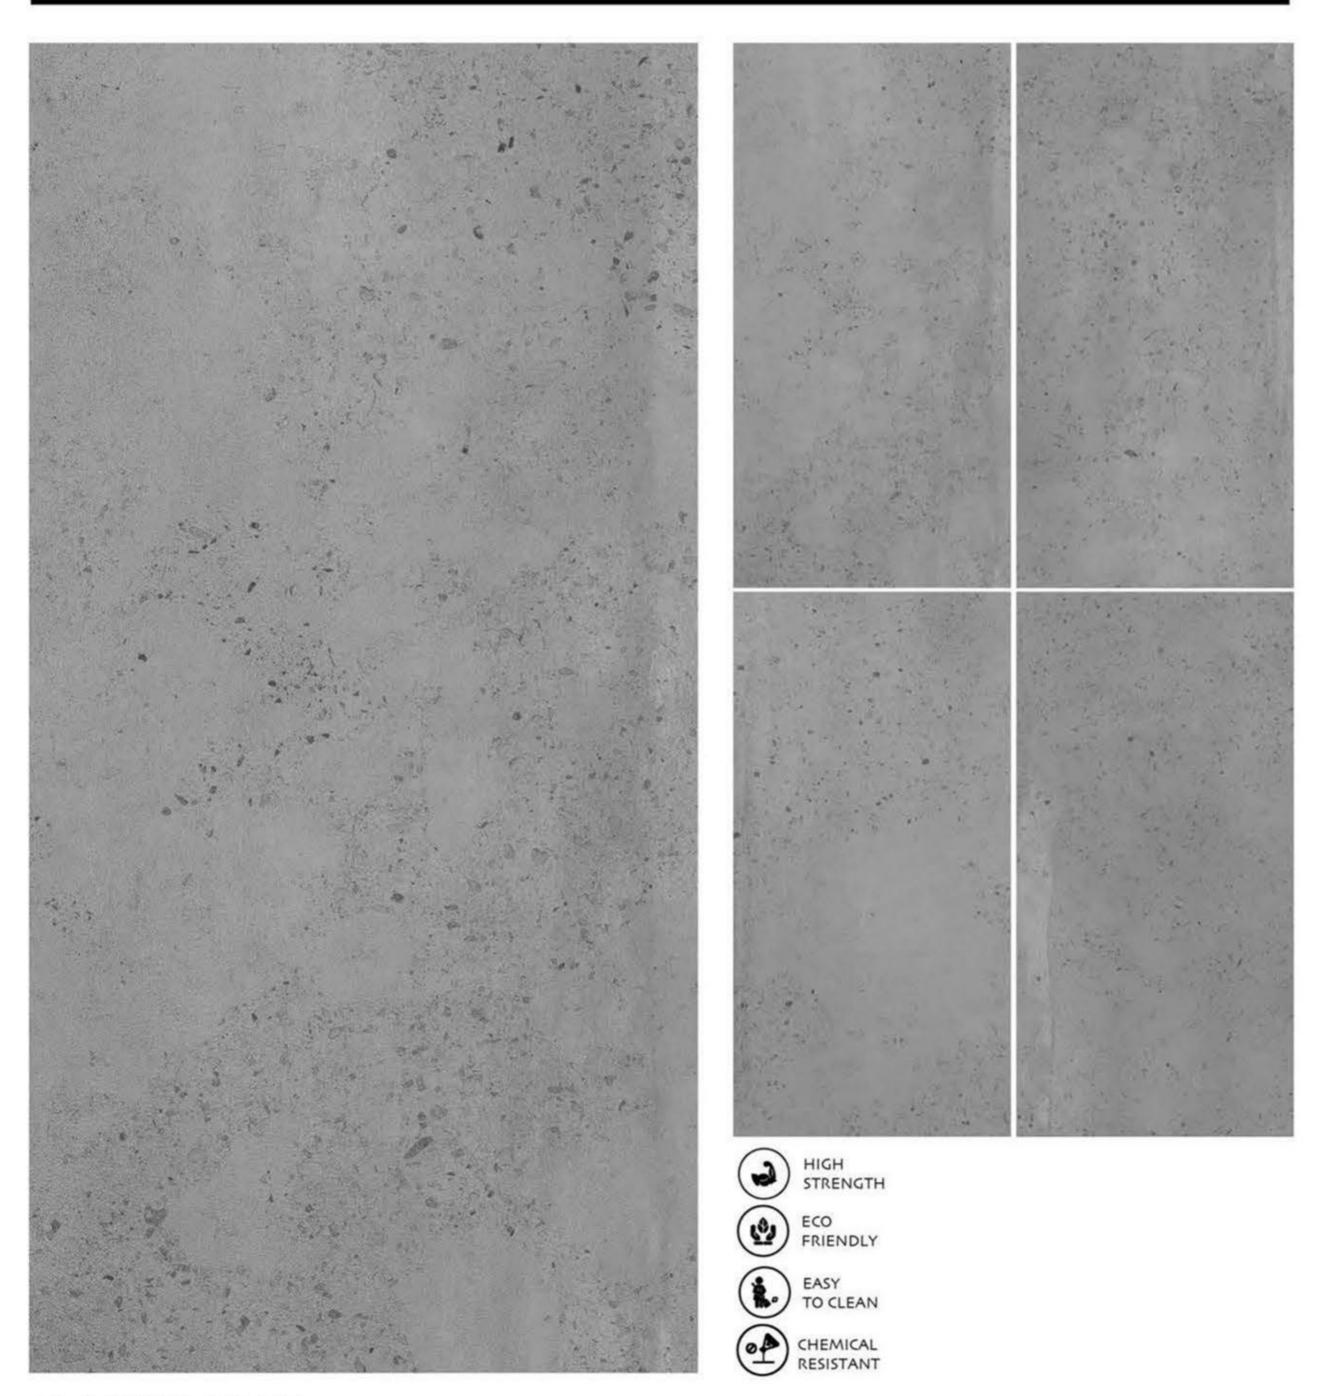


CLARITO GREY



GLAZED VITRIFIED TILES


FINISH: MATT

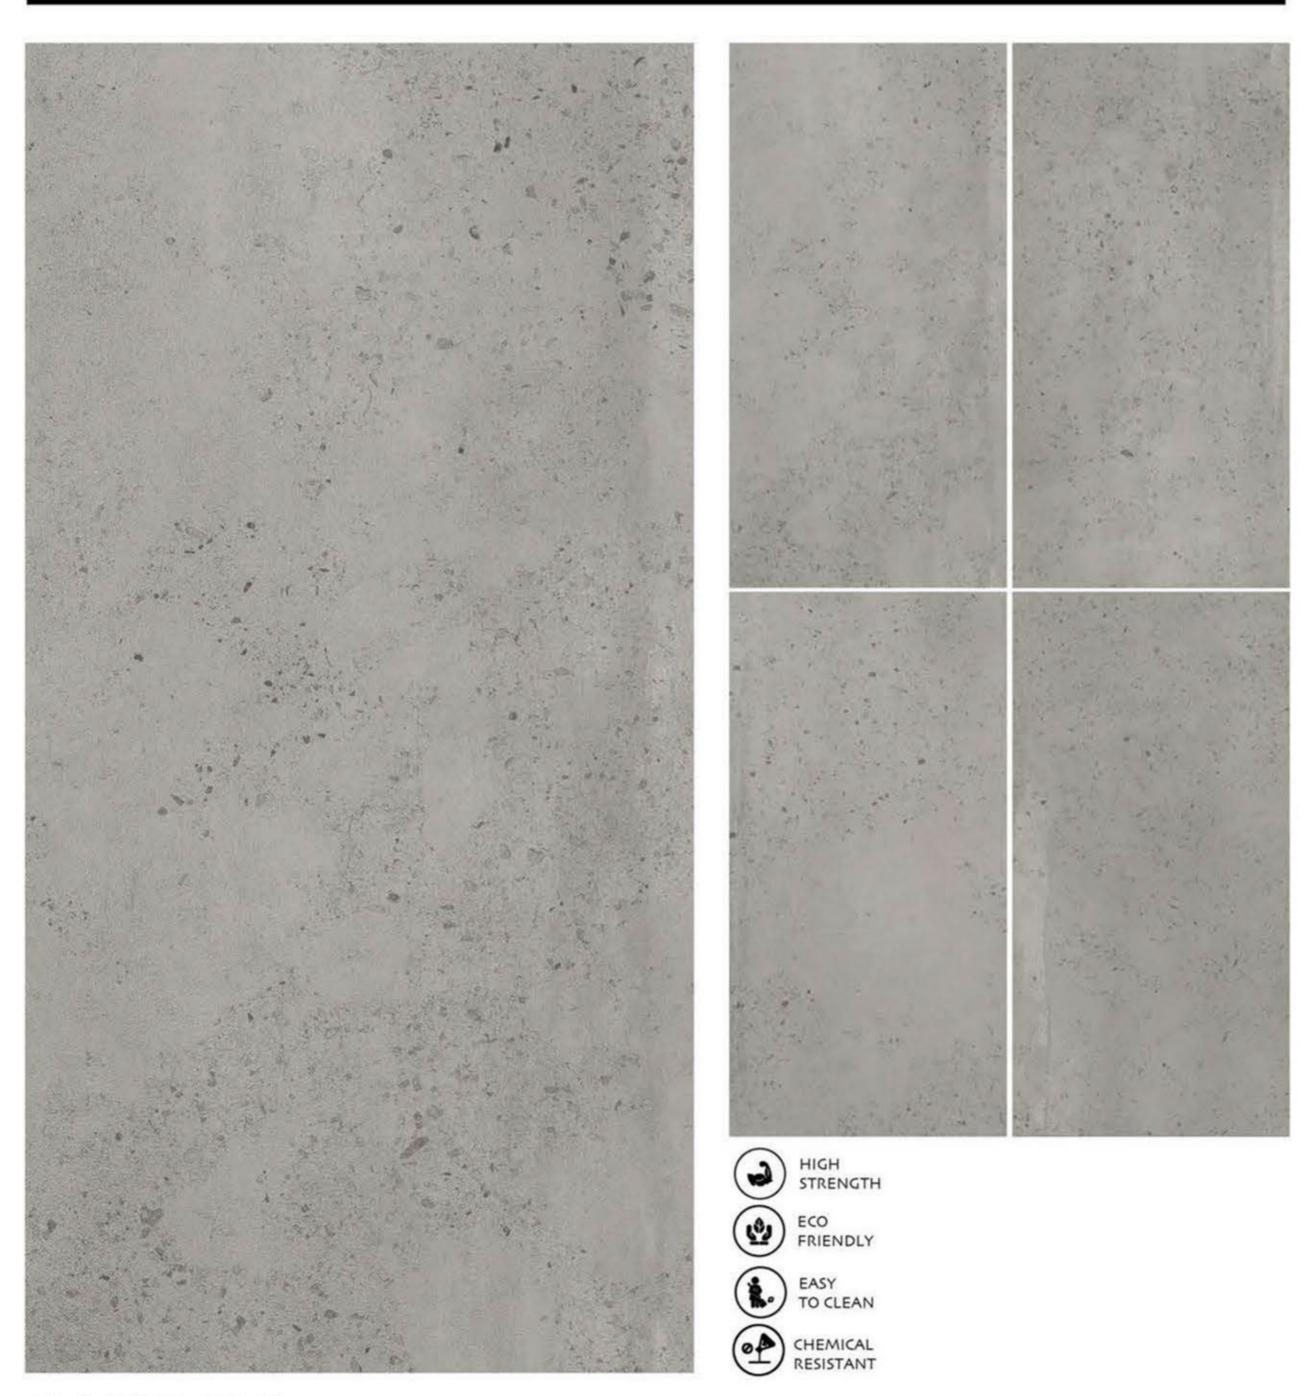

CLARITO GRIS




GLAZED VITRIFIED TILES

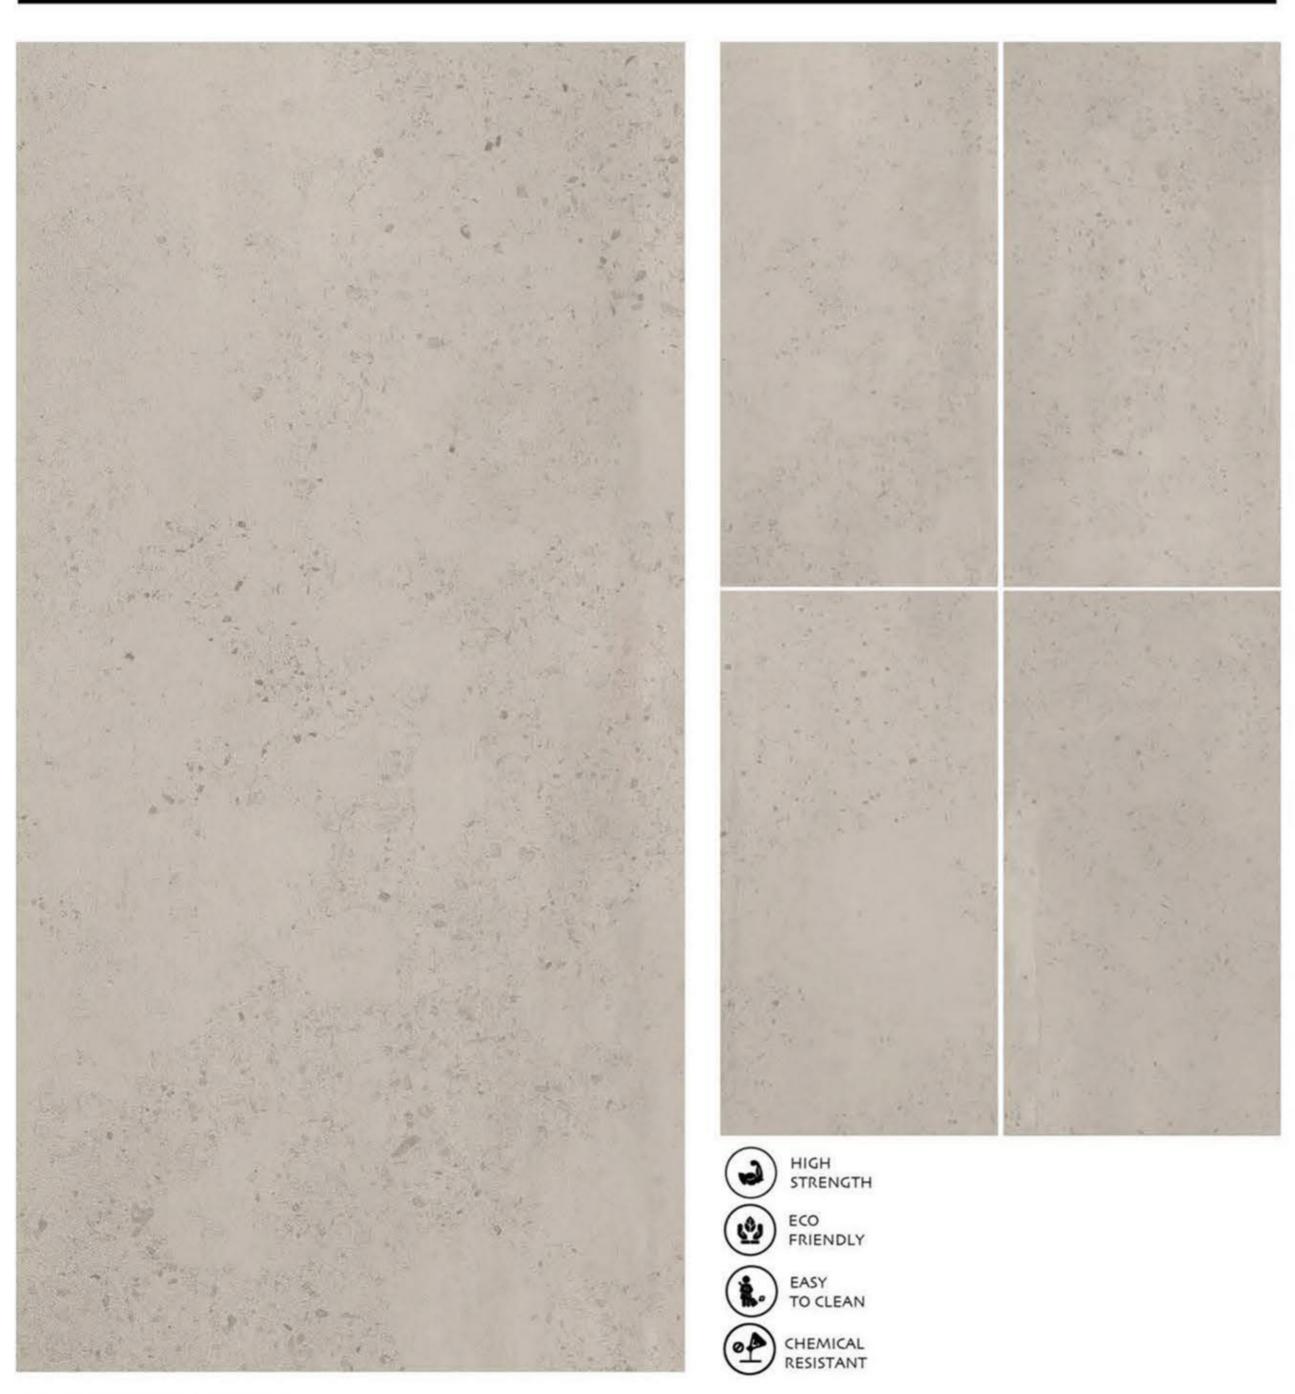



GLAZED VITRIFIED TILES

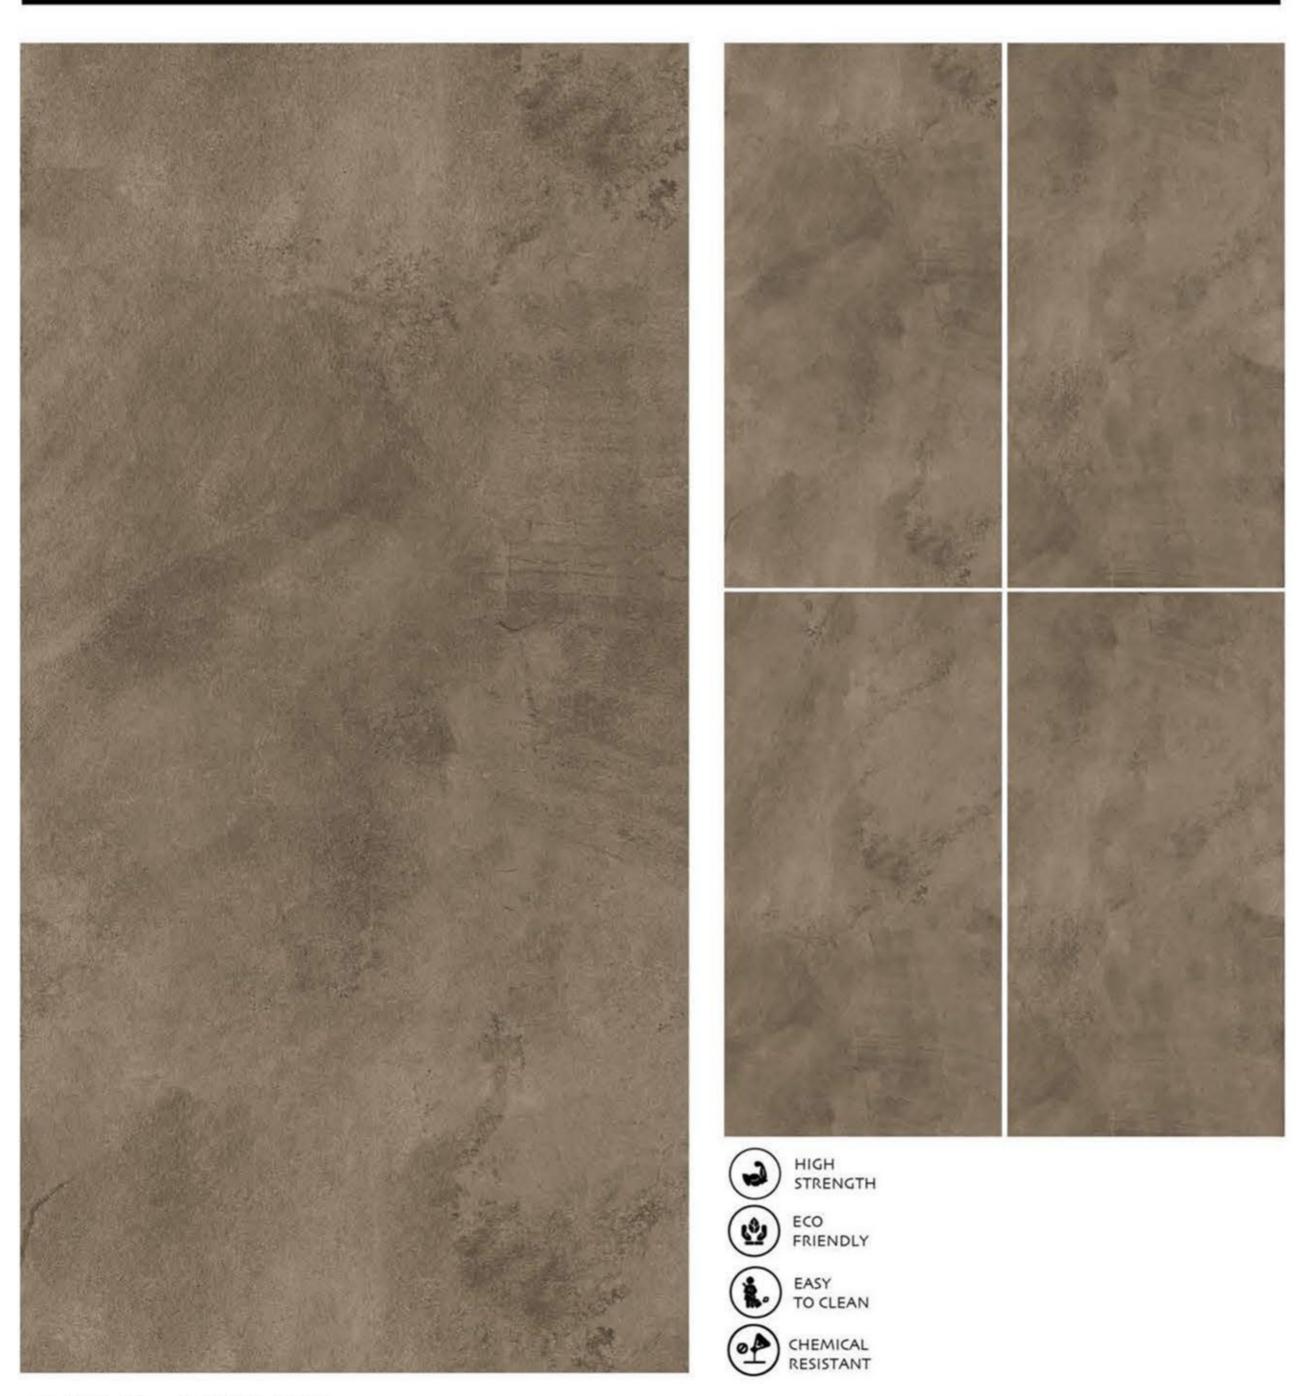

CLOUD BROWN



GLAZED VITRIFIED TILES






GLAZED VITRIFIED TILES



CLOUD GREY




GLAZED VITRIFIED TILES

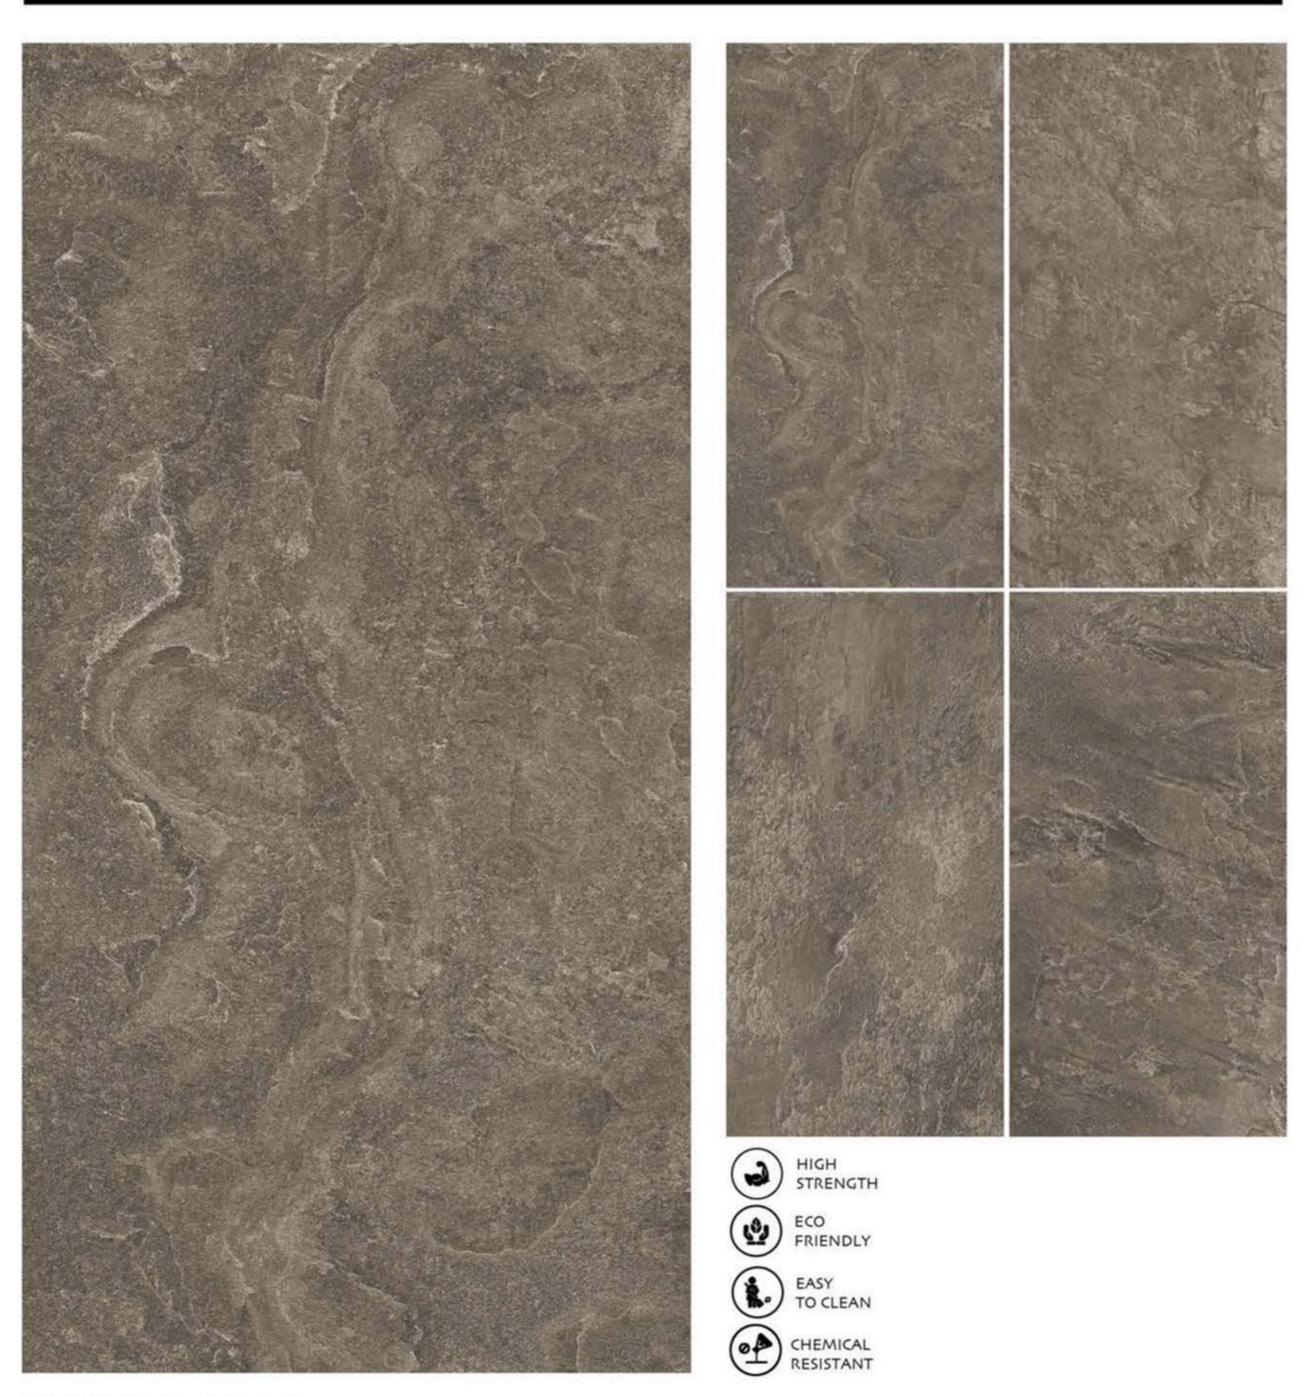

DESERT BEIGE



GLAZED VITRIFIED TILES

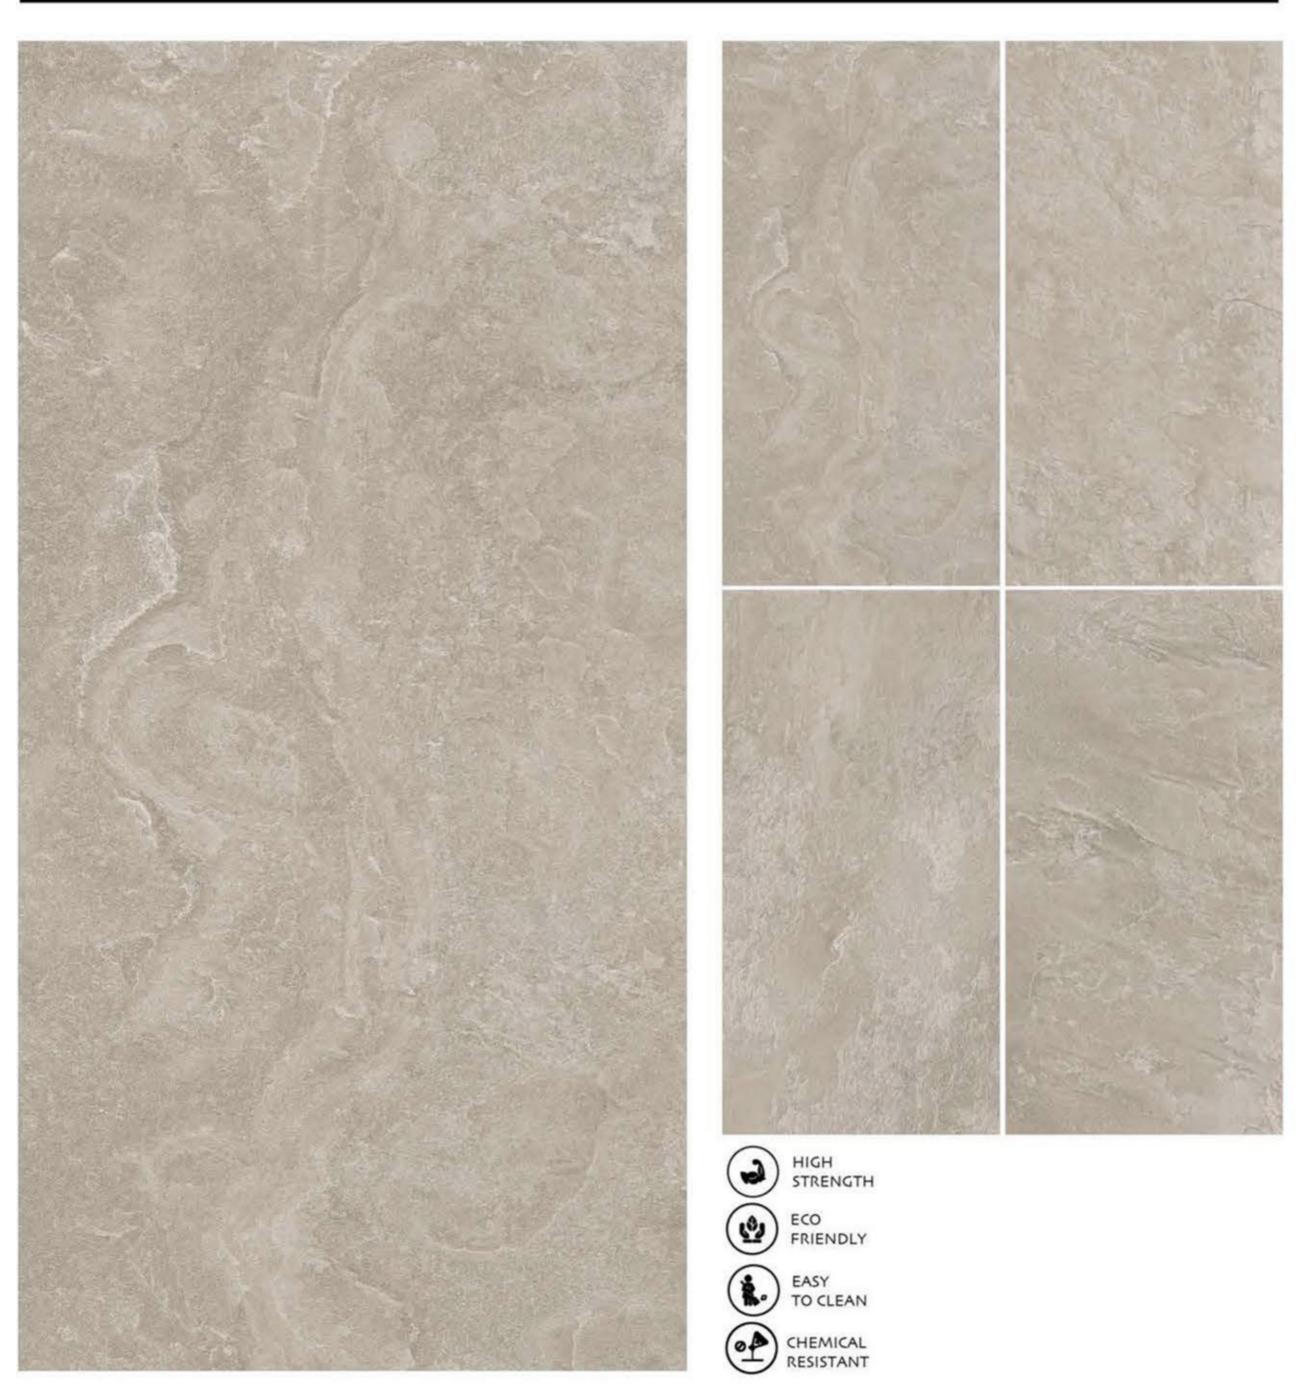

DESERT CREMA



GLAZED VITRIFIED TILES



DESERT GREY



GLAZED VITRIFIED TILES


FINISH: MATT



DESERT WHITE



GLAZED VITRIFIED TILES

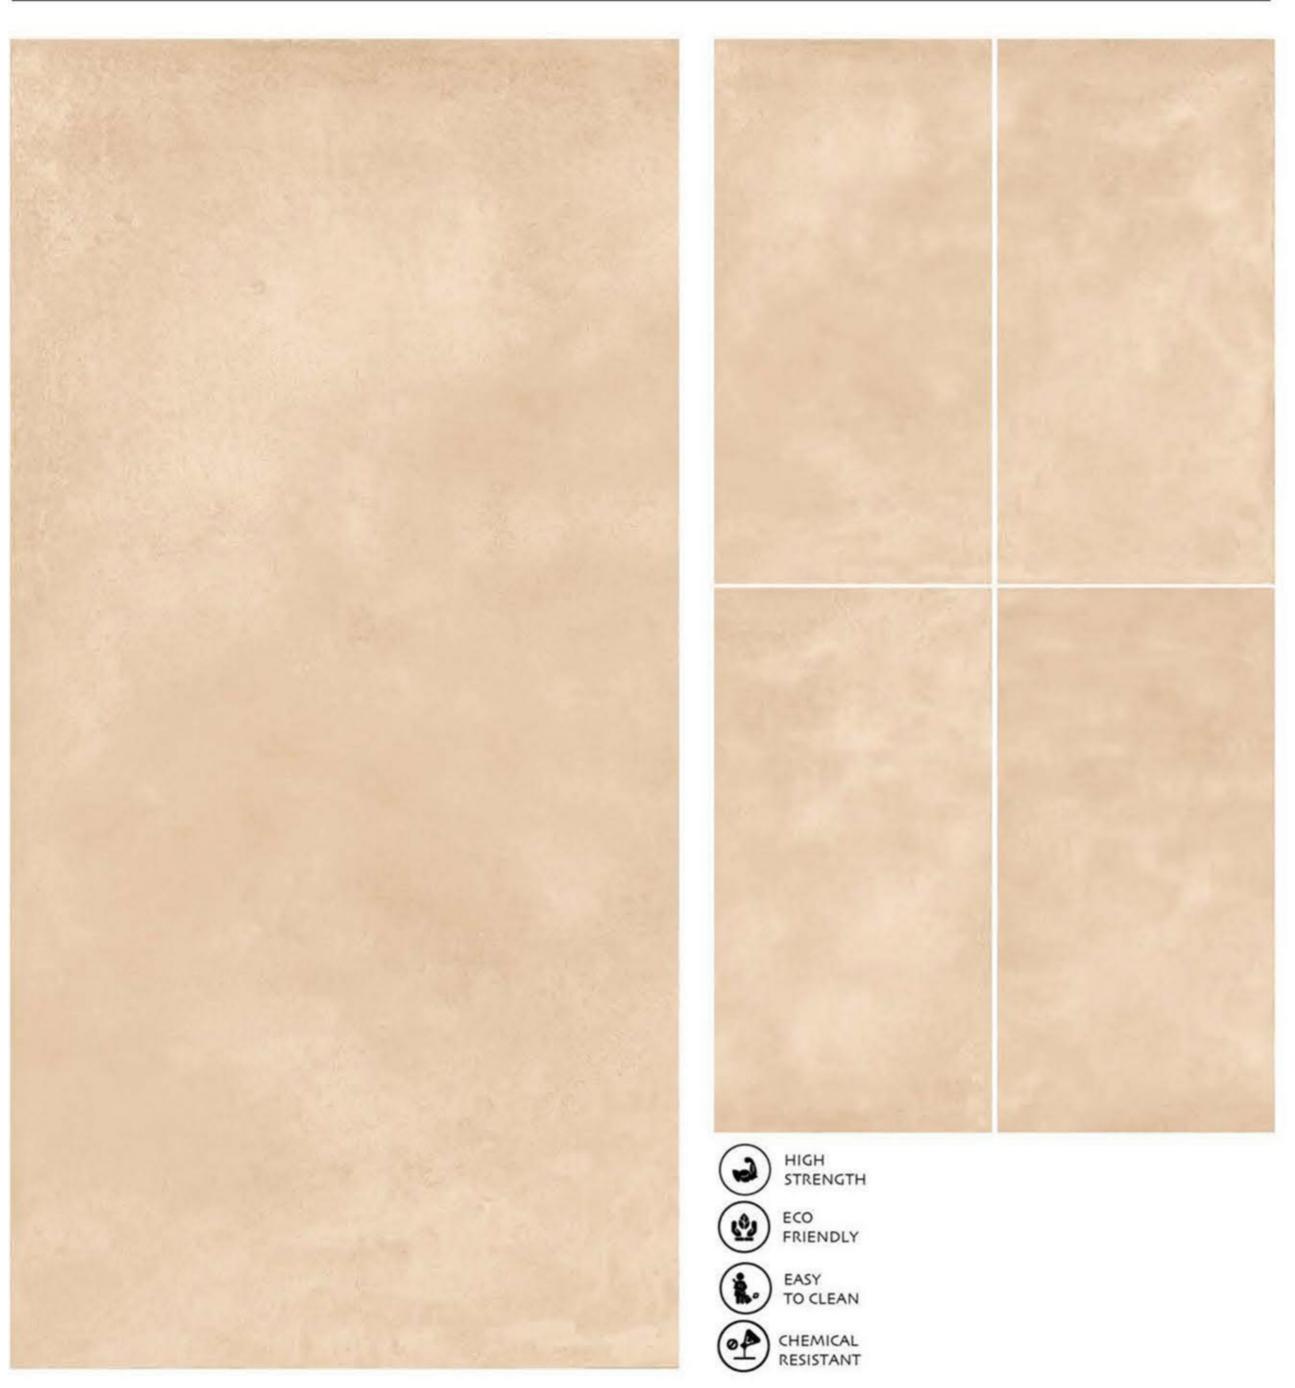




GLAZED VITRIFIED TILES

FINISH: MATT



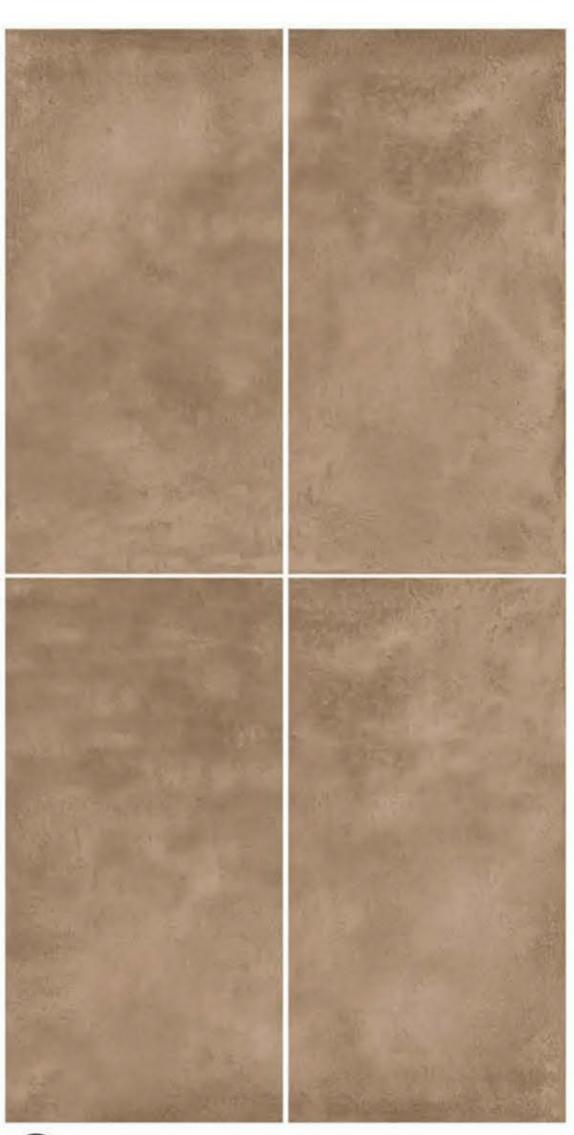



HIGH STRENGTH



ECO FRIENDLY




EASY TO CLEAN



CHEMICAL RESISTANT




GLAZED VITRIFIED TILES

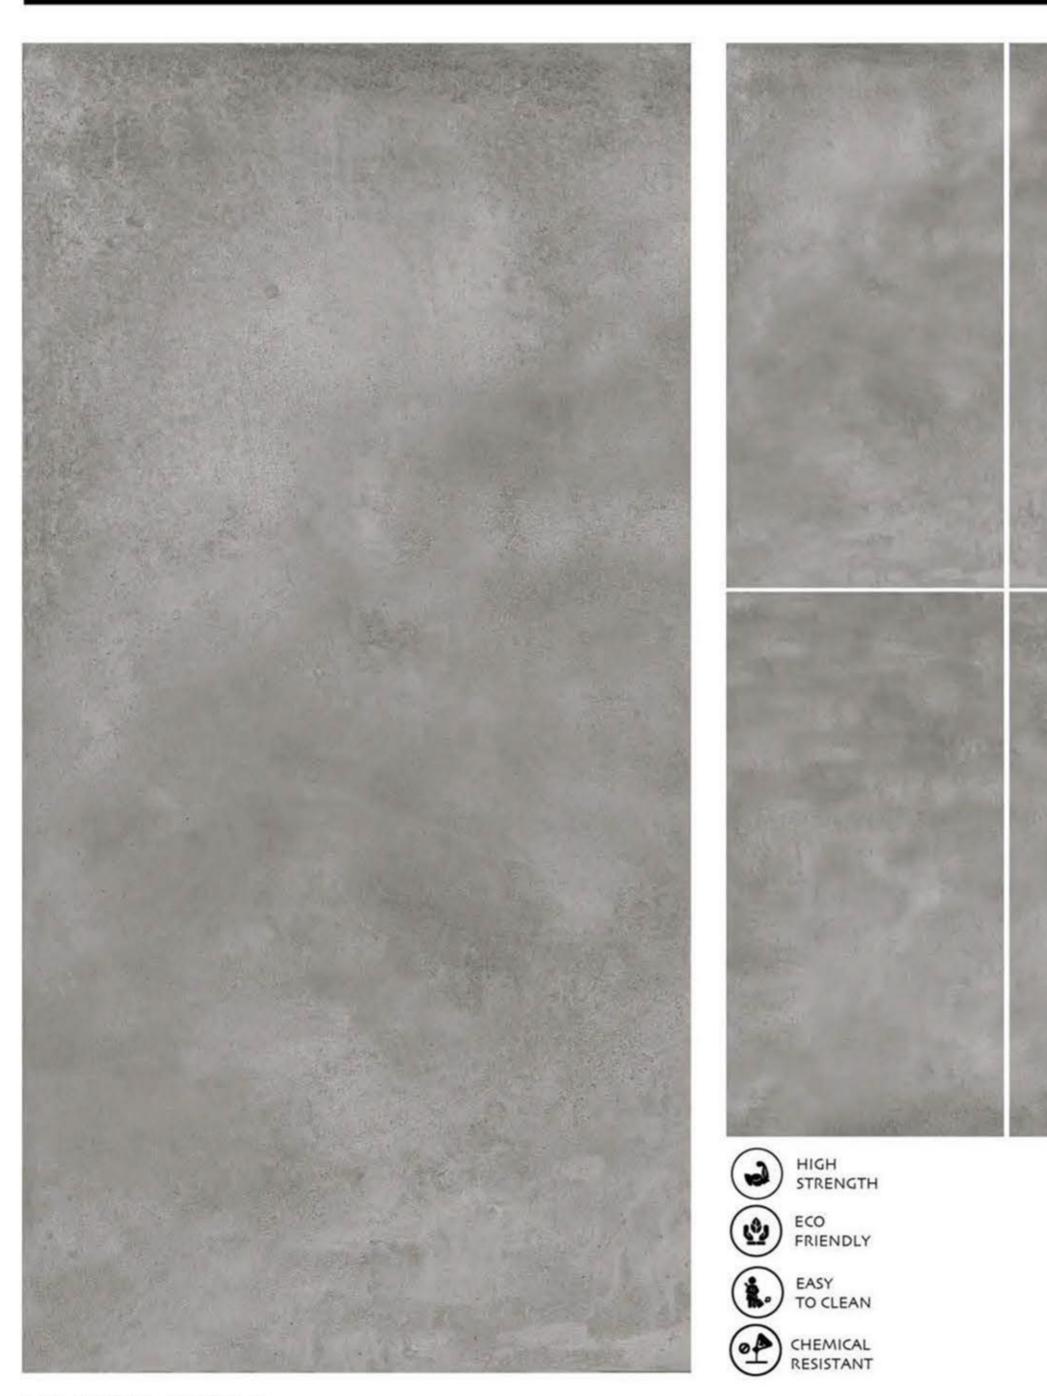



GLAZED VITRIFIED TILES

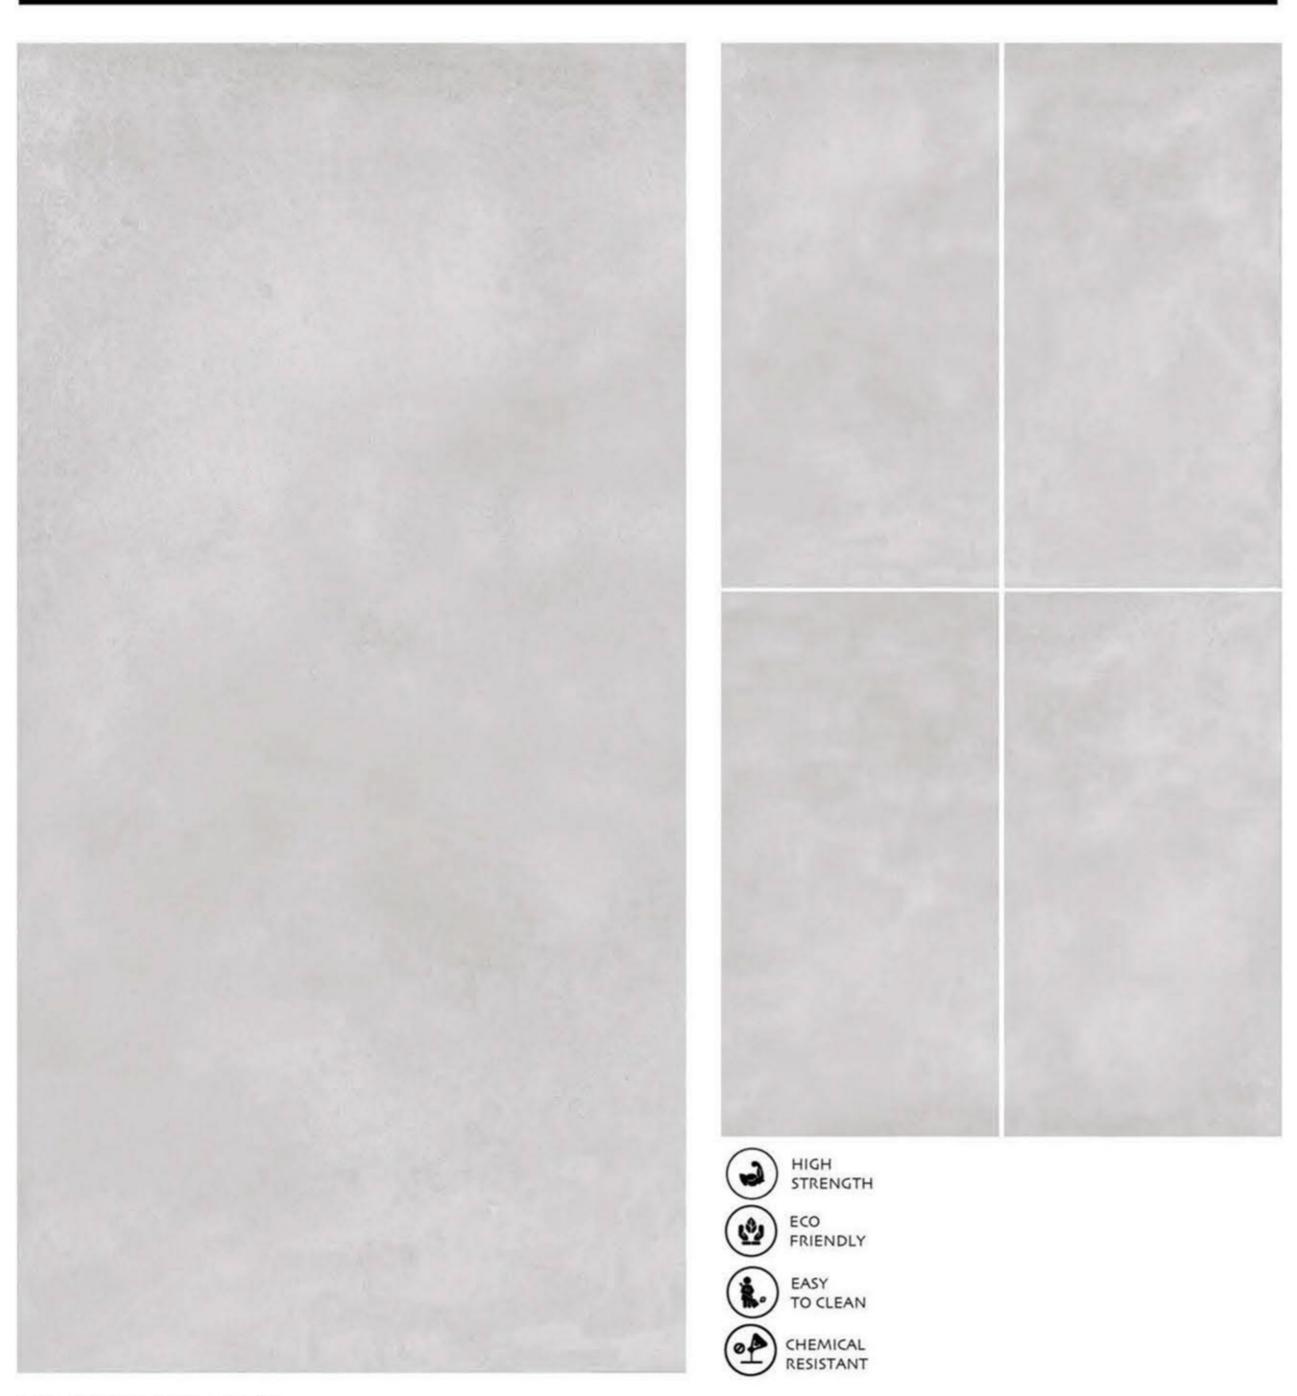




GLAZED VITRIFIED TILES





GLAZED VITRIFIED TILES

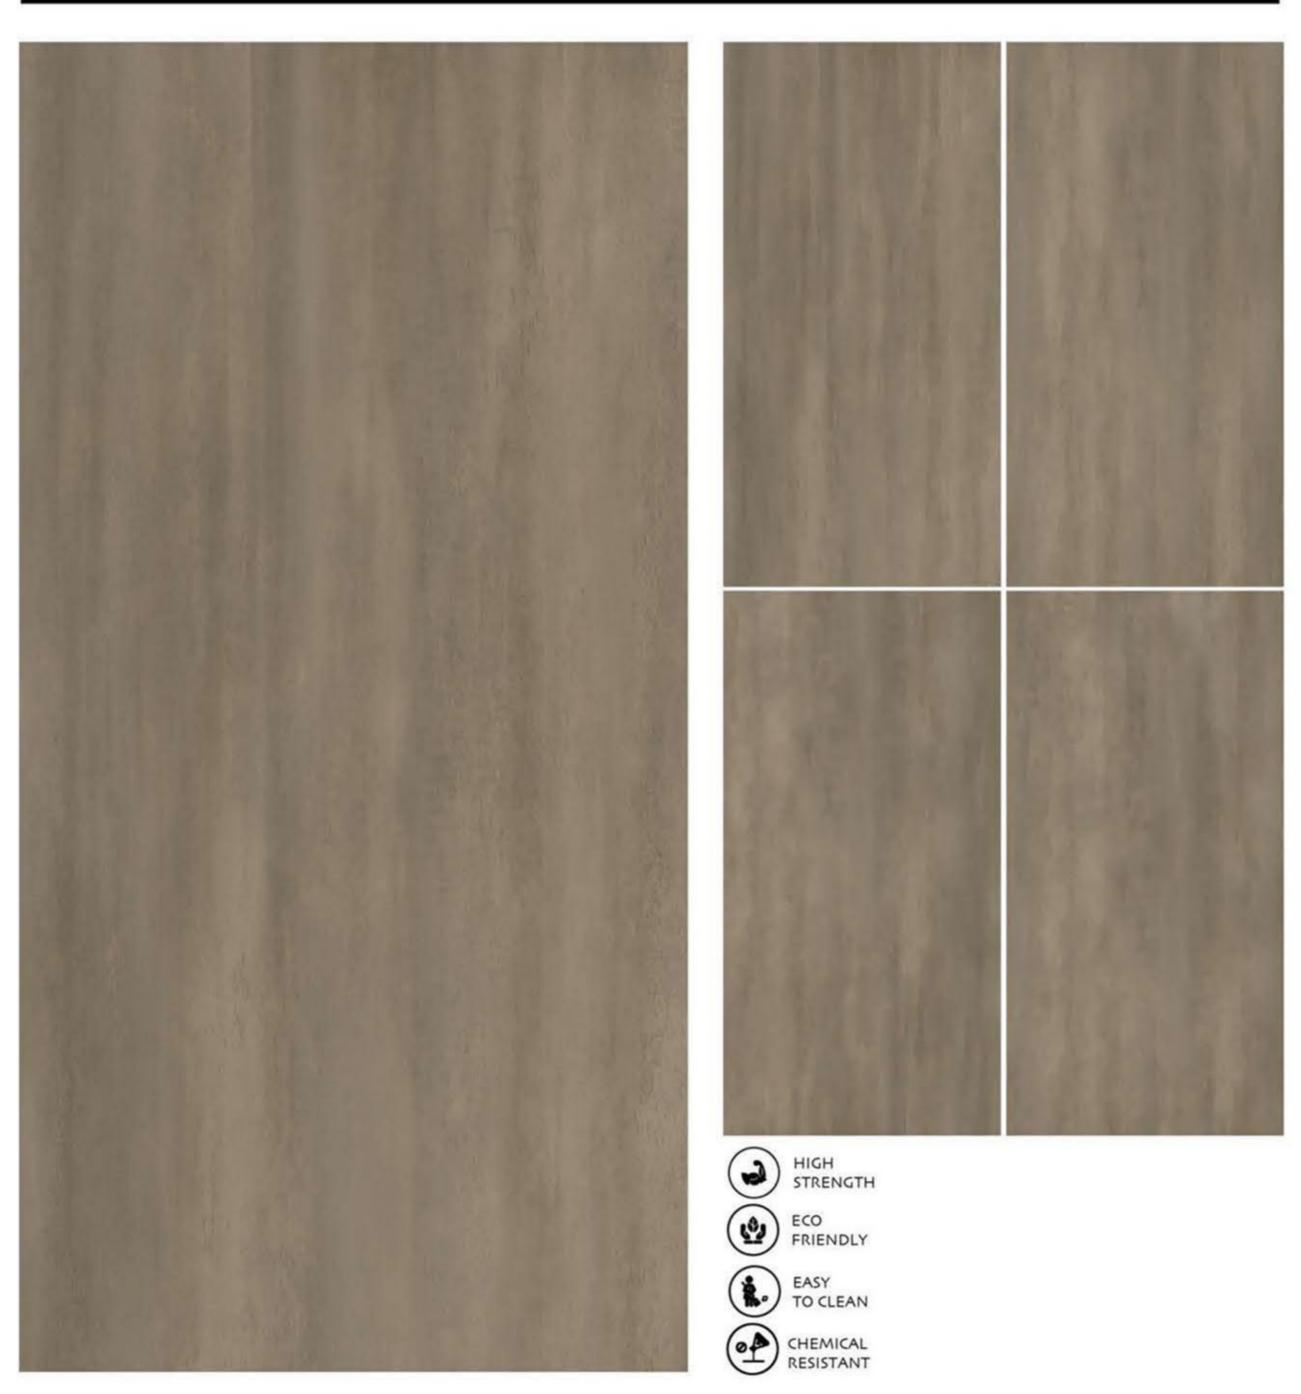



GLAZED VITRIFIED TILES





GLAZED VITRIFIED TILES






GLAZED VITRIFIED TILES






GLAZED VITRIFIED TILES

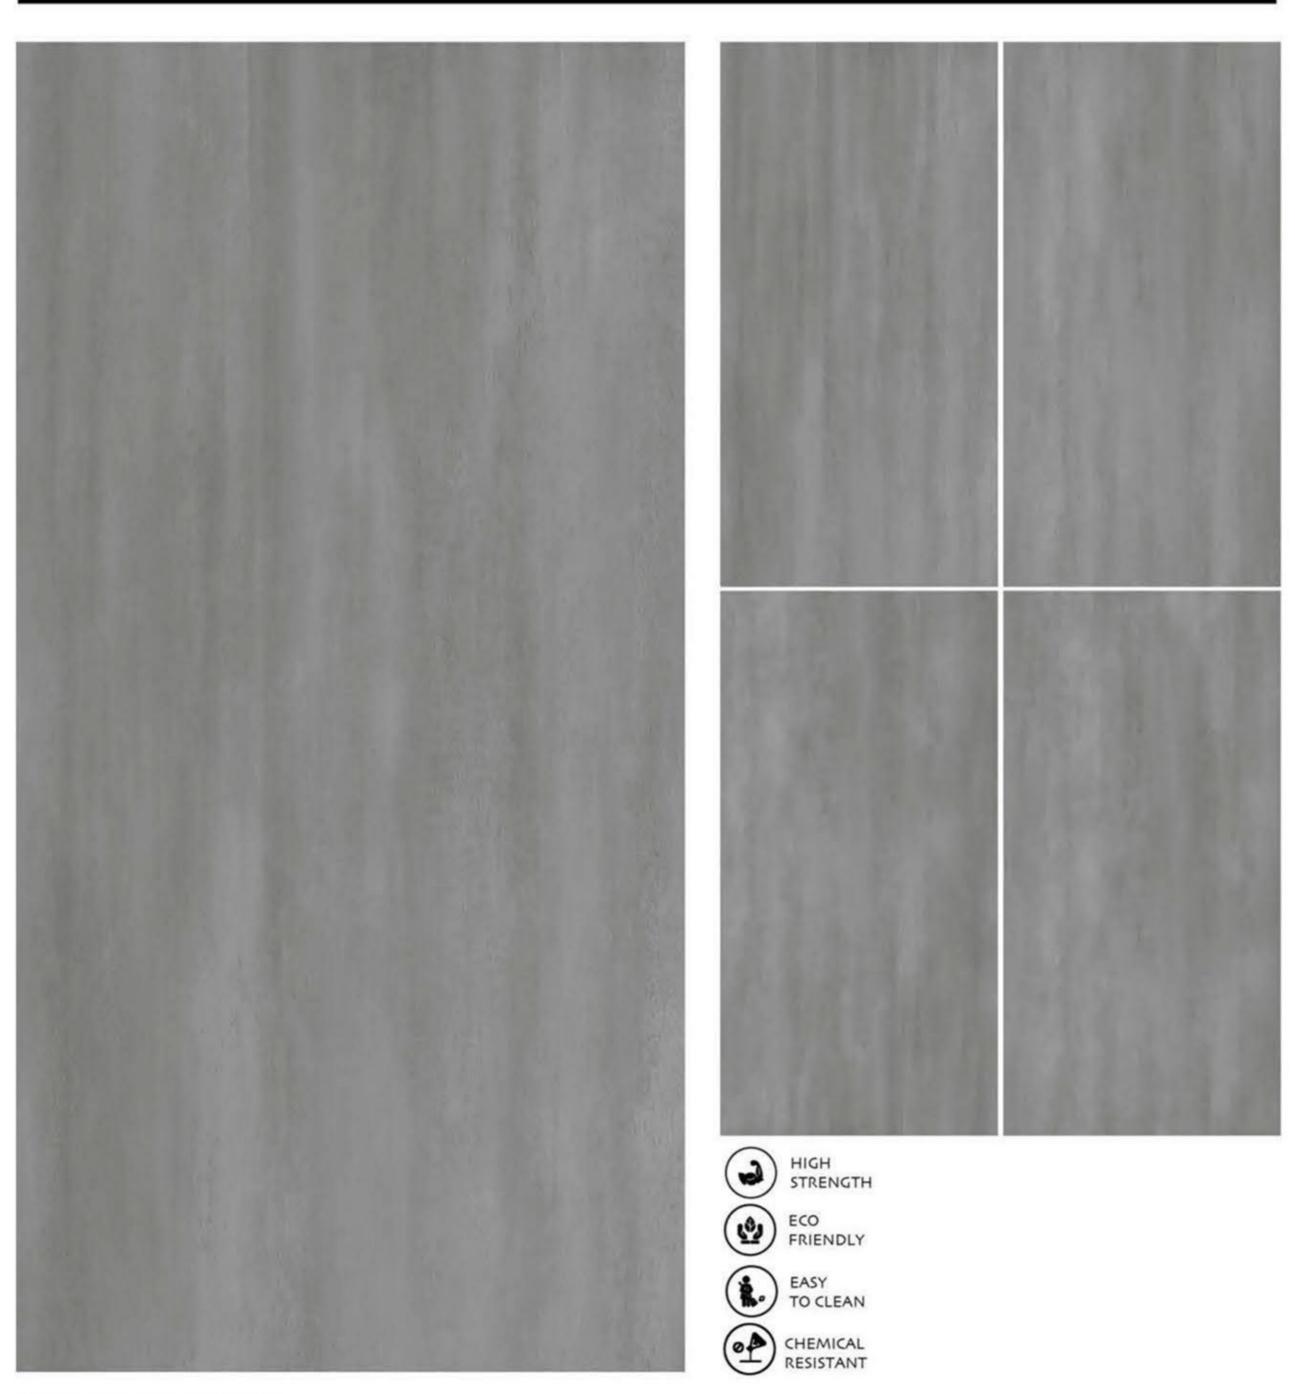




GLAZED VITRIFIED TILES

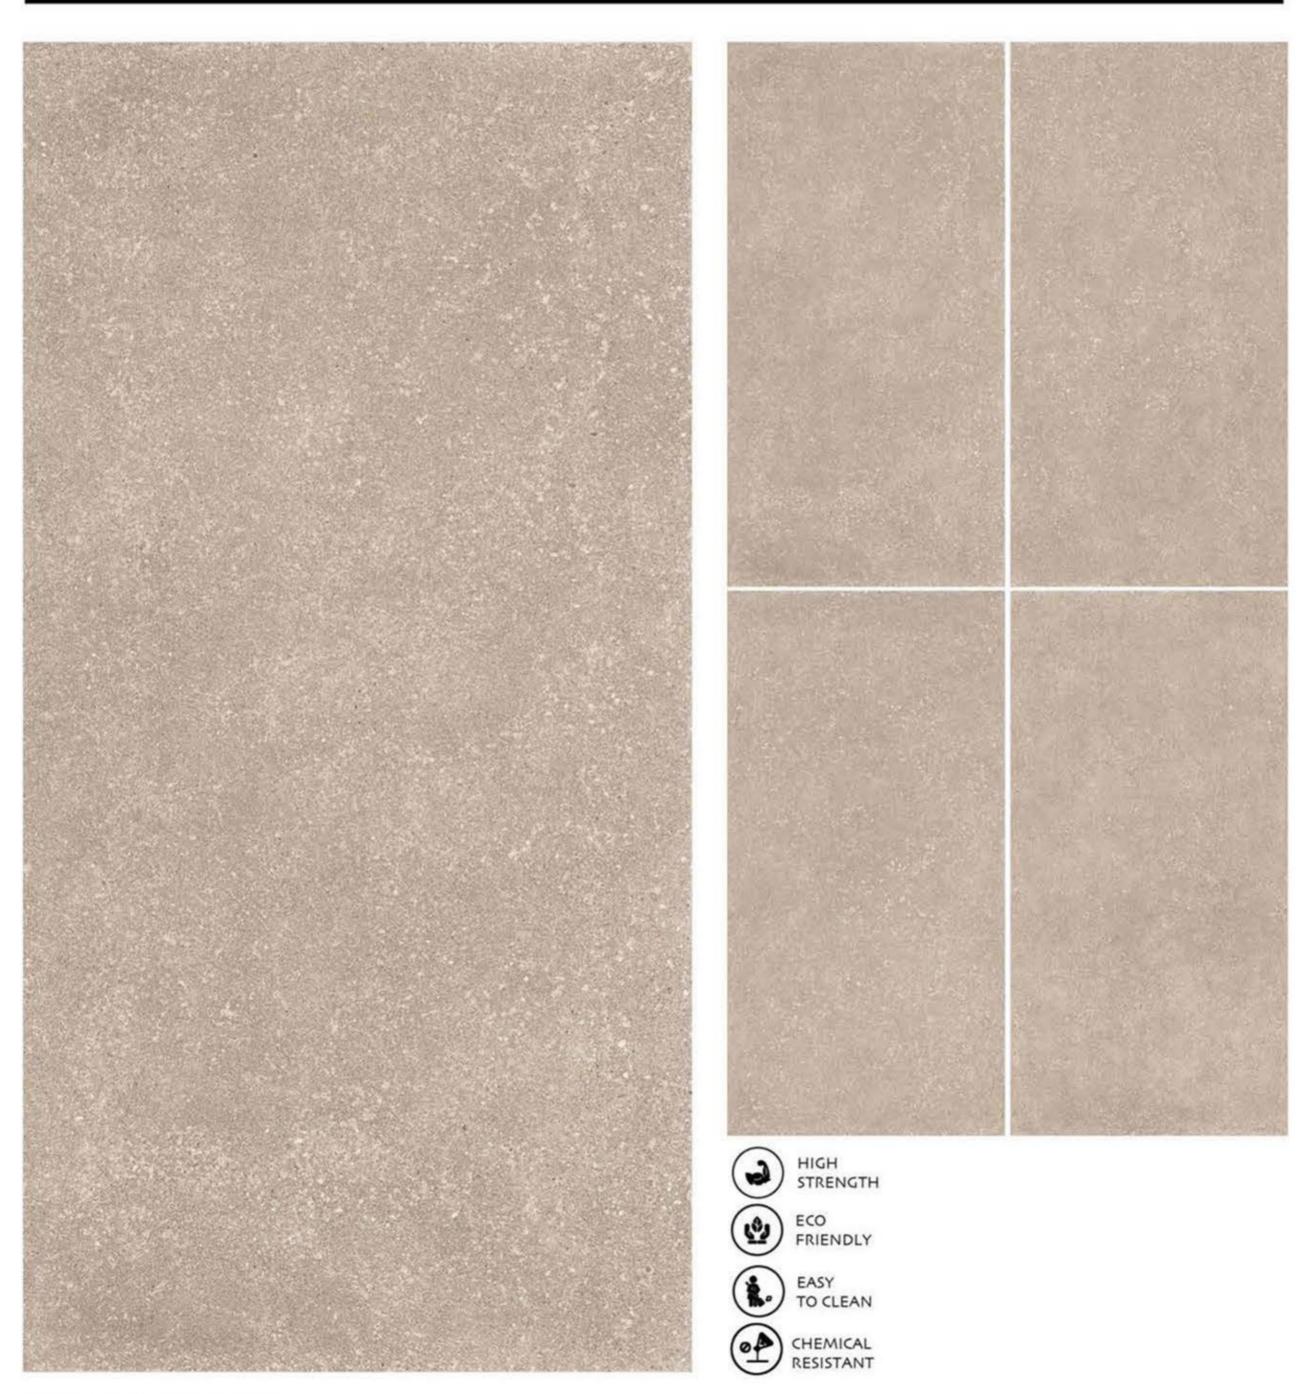




GLAZED VITRIFIED TILES

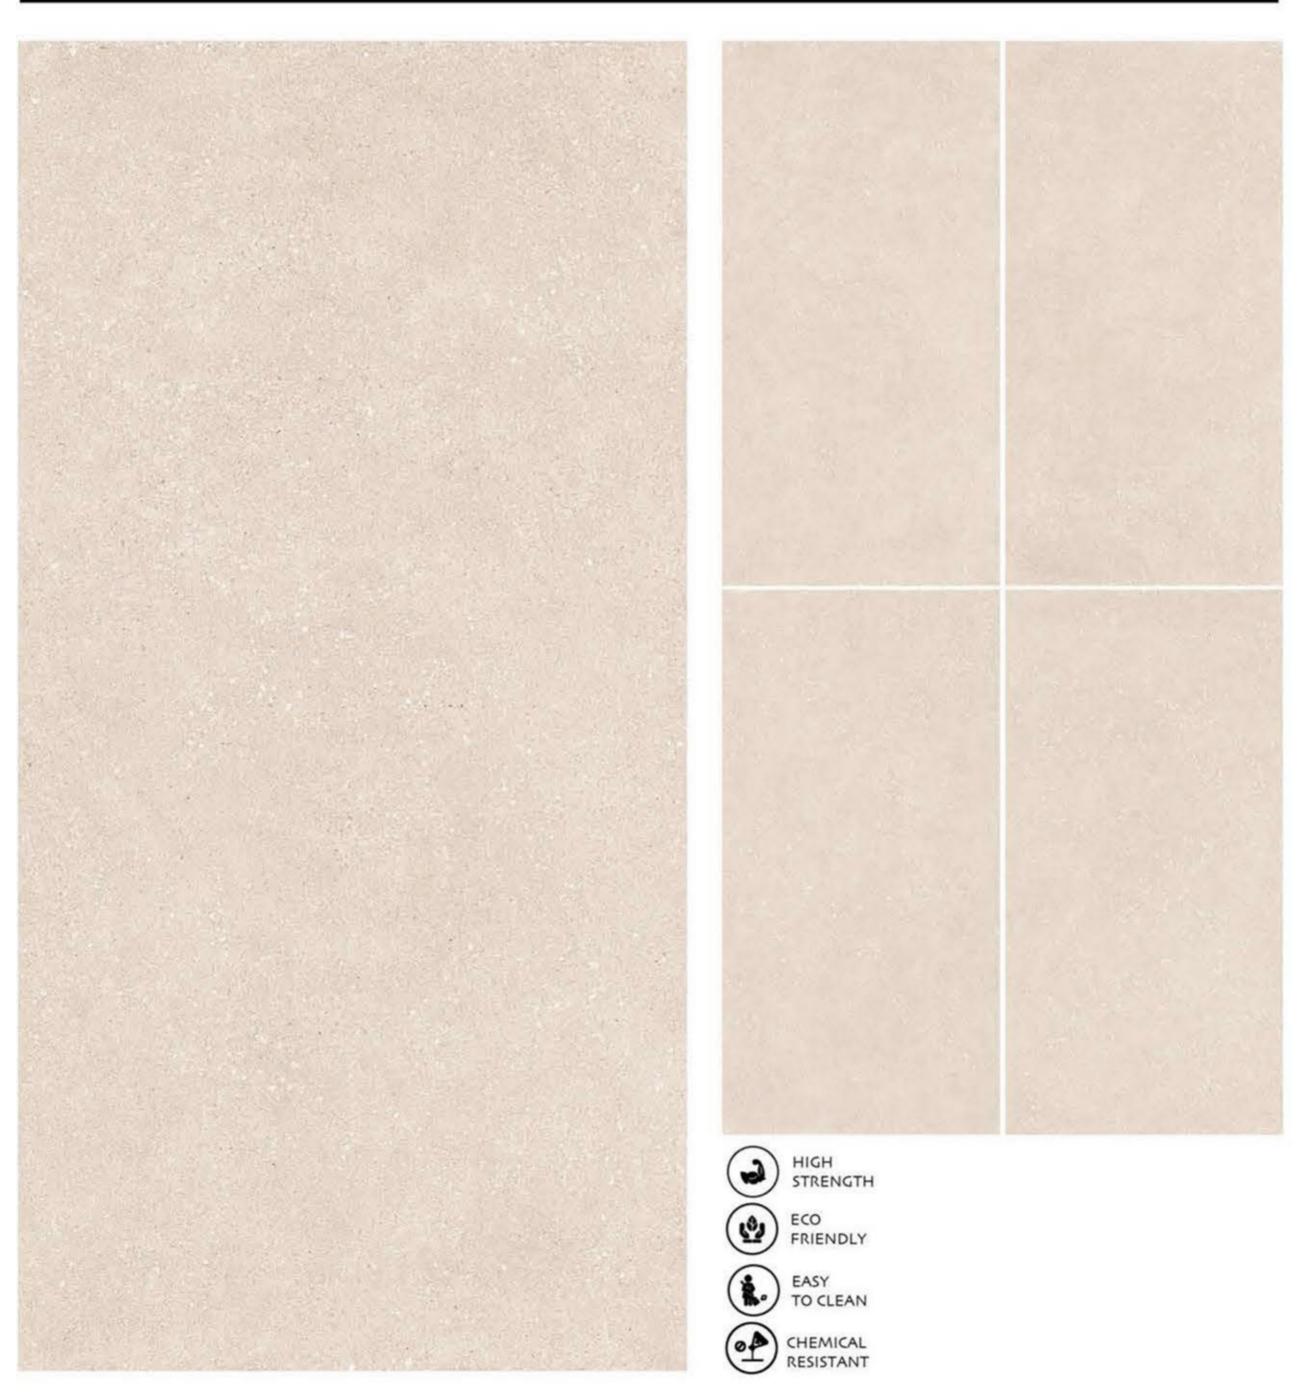




GLAZED VITRIFIED TILES

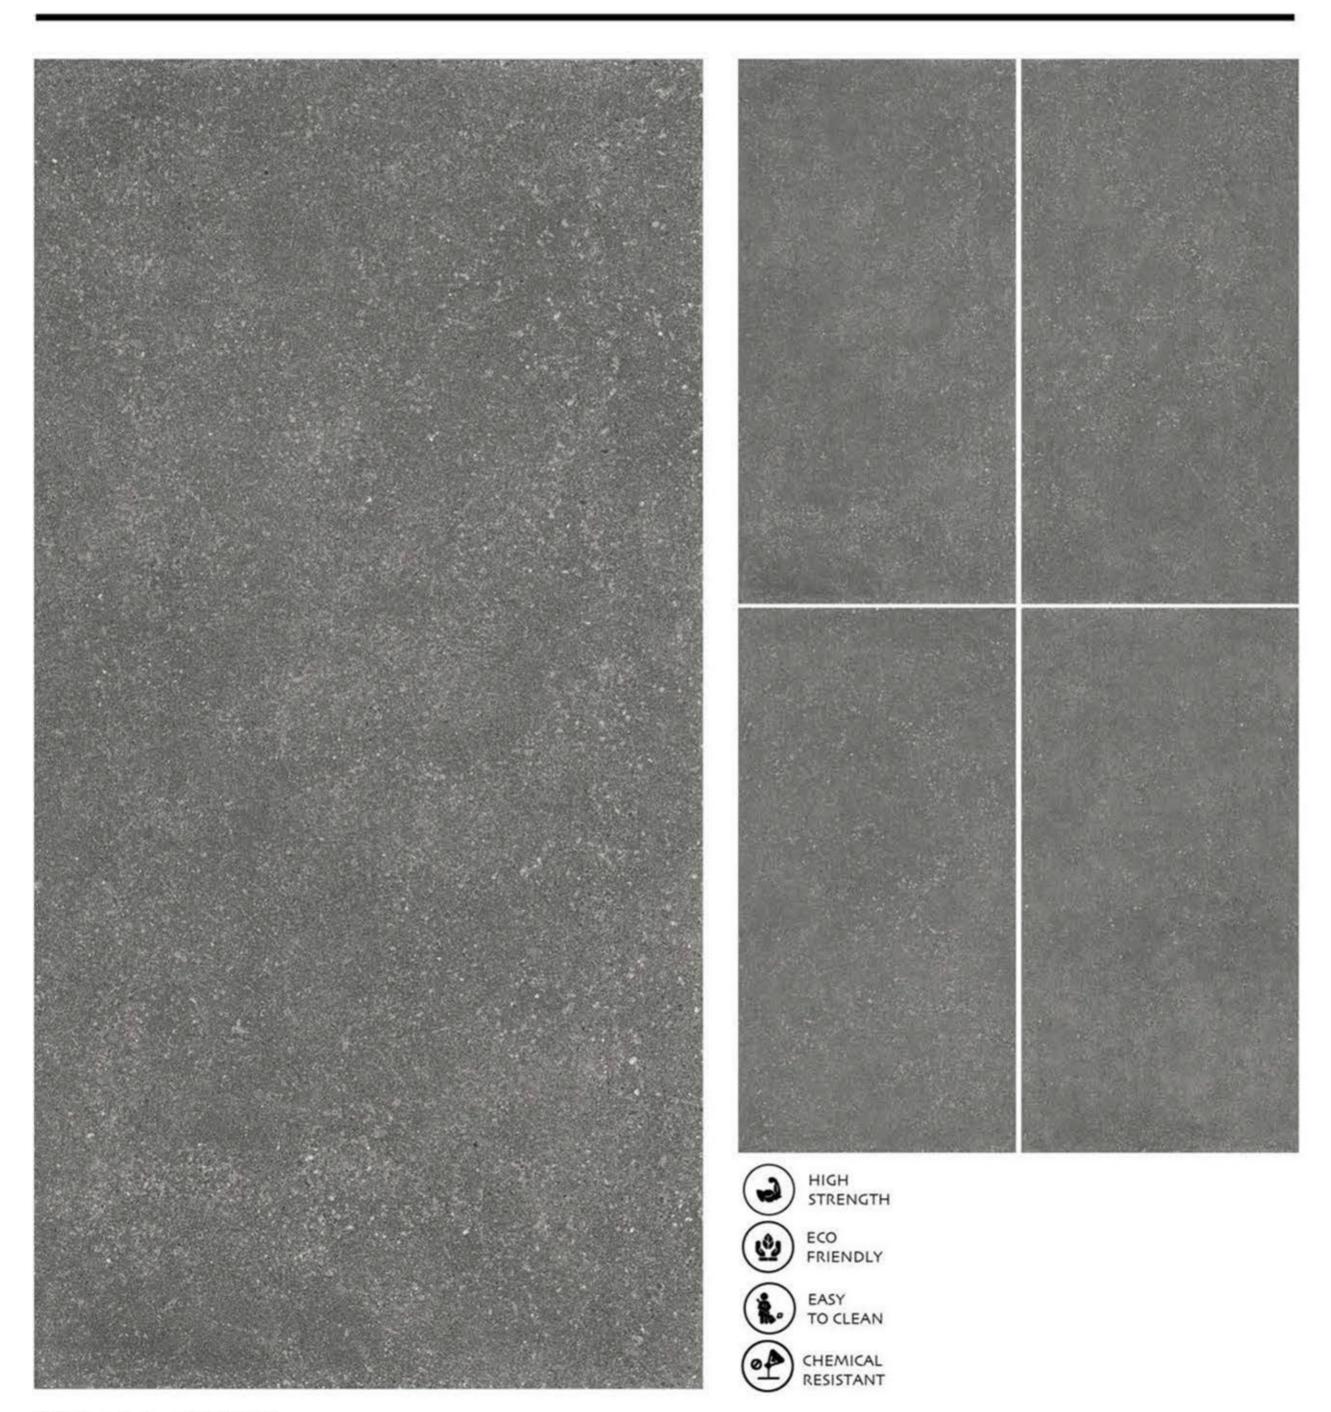



GLAZED VITRIFIED TILES

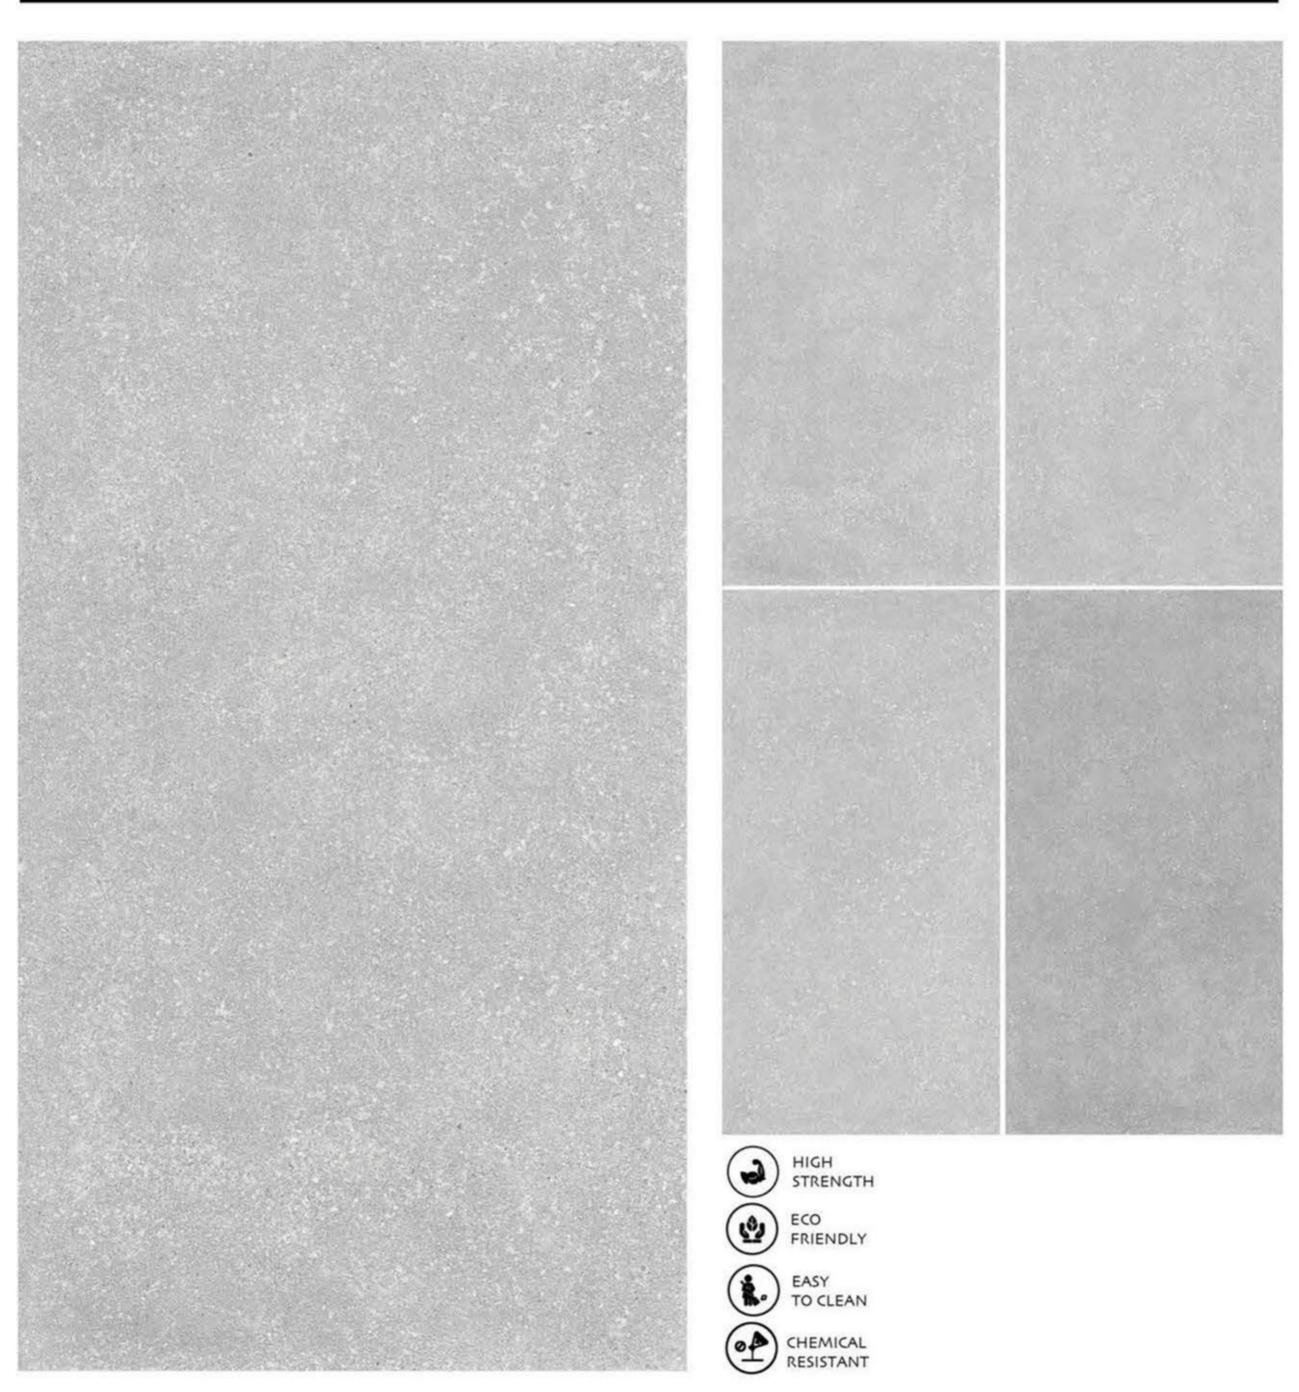



GLAZED VITRIFIED TILES



KARSIN BEIGE



GLAZED VITRIFIED TILES



KARSIN BIANCO



GLAZED VITRIFIED TILES



KARSIN GREY



GLAZED VITRIFIED TILES





GLAZED VITRIFIED TILES






GLAZED VITRIFIED TILES

FINISH: MATT



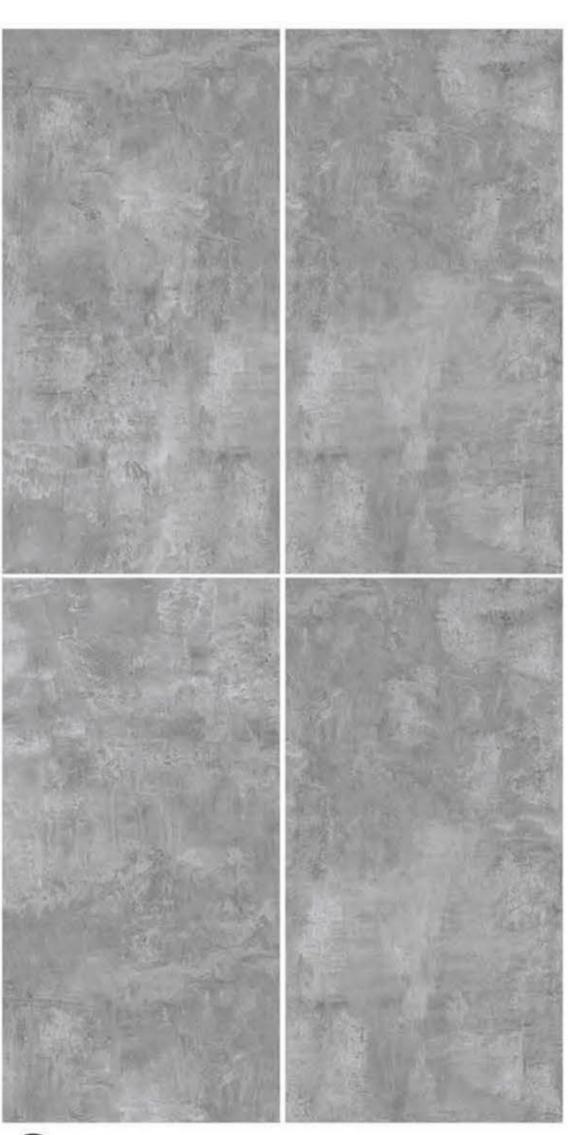



HIGH STRENGTH



ECO FRIENDLY



EASY TO CLEAN




CHEMICAL RESISTANT



GLAZED VITRIFIED TILES

FINISH: MATT

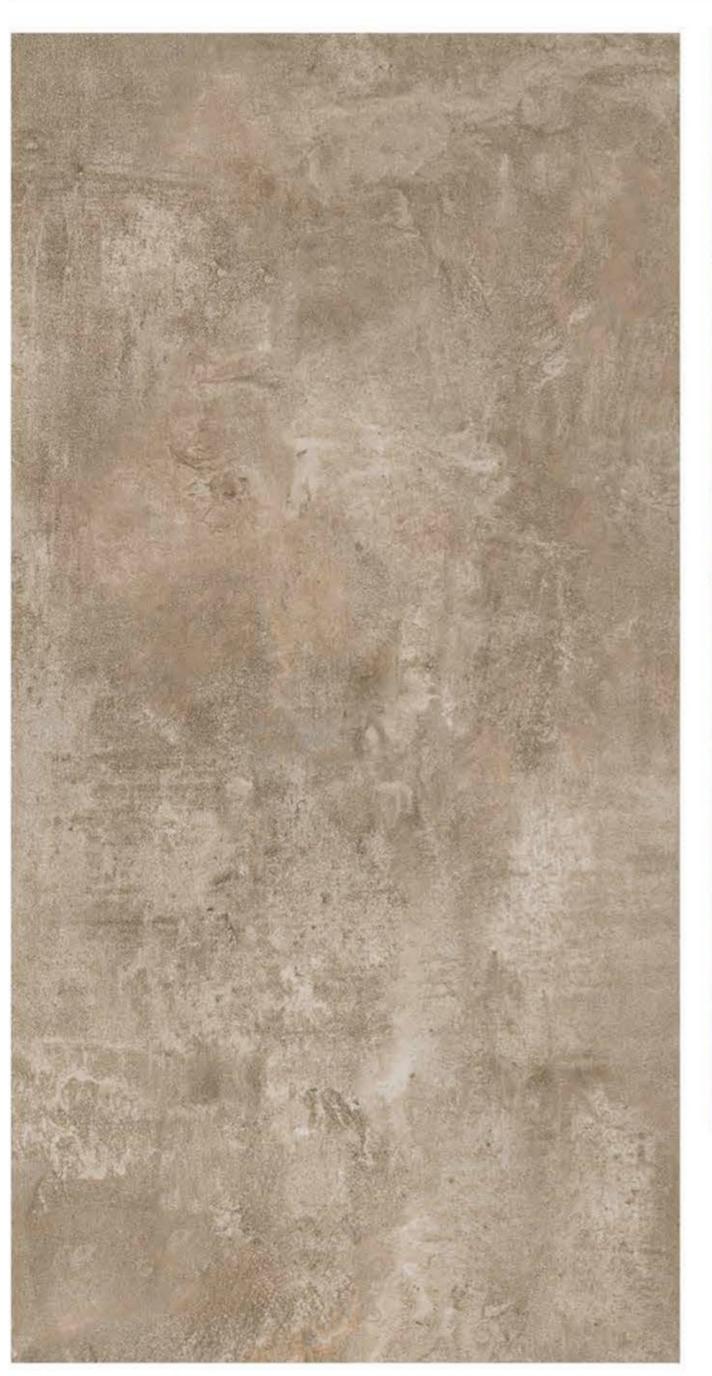




ECO FRIENDLY

EASY TO CLEAN

CHEMICAL RESISTANT




GLAZED VITRIFIED TILES

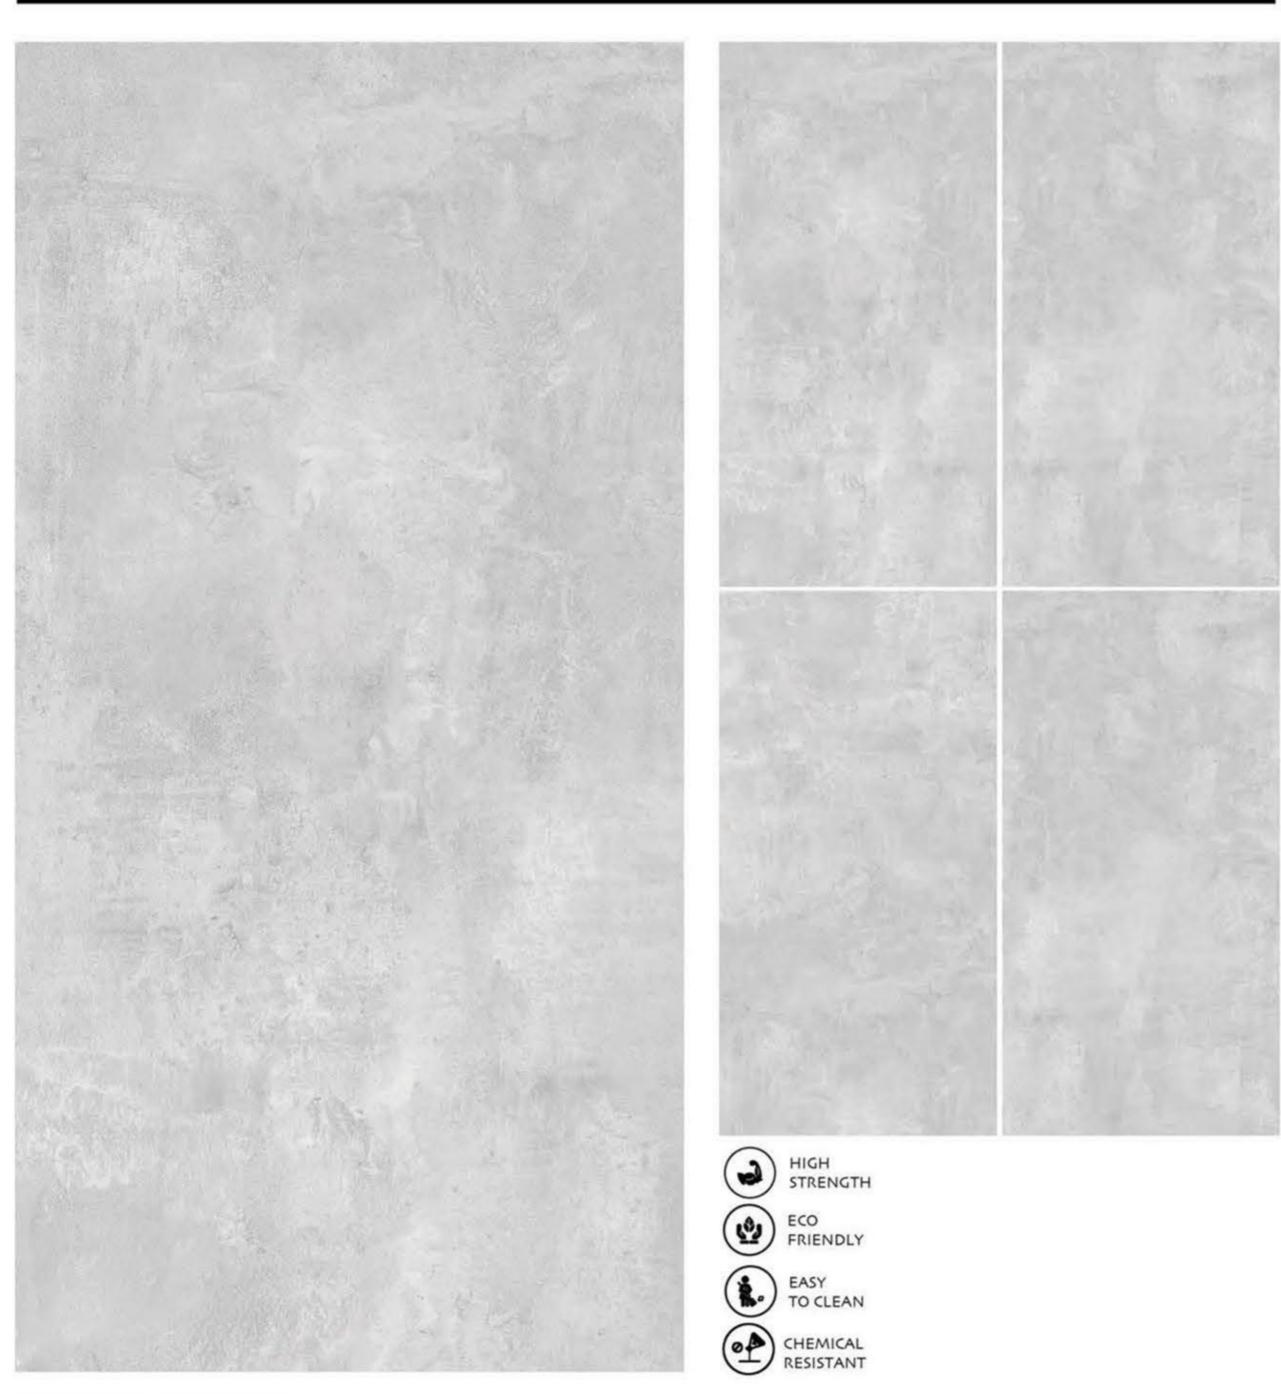



GLAZED VITRIFIED TILES

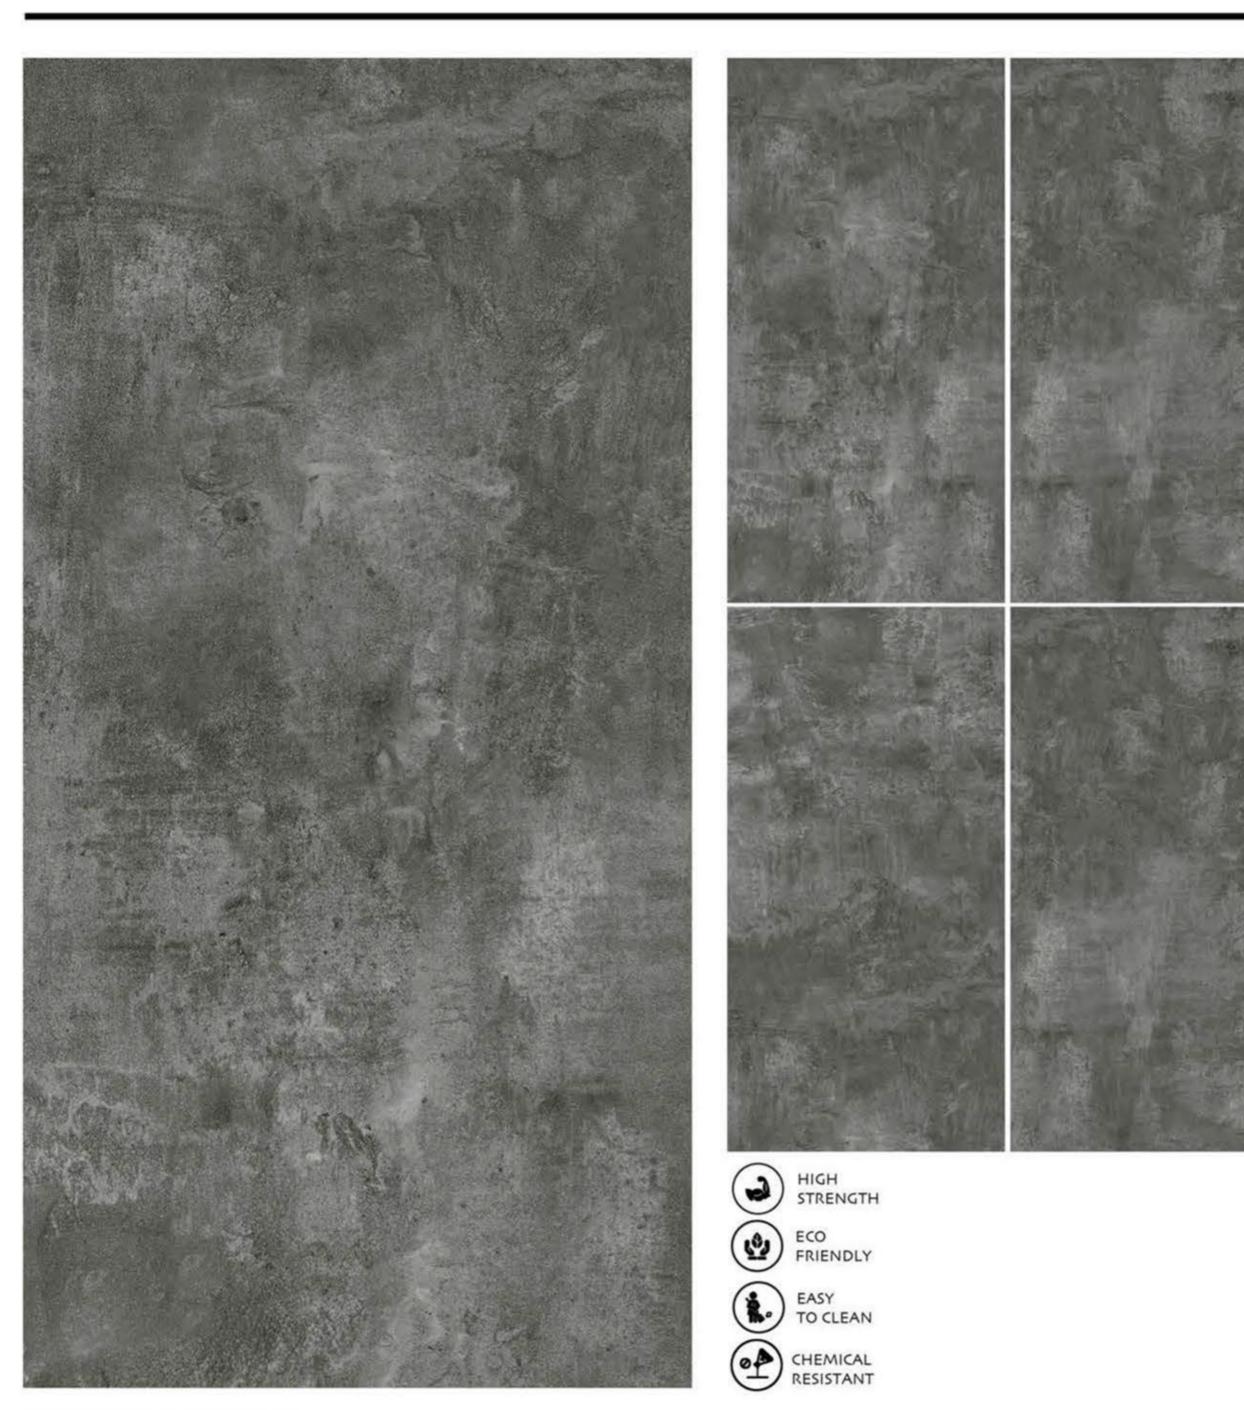

KYOTO VERDE

TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 B1a TILES	VALUE
Length and Width	BS EN ISO 10545-2	::0.6%b	±0.3%
Thickness	BS EN ISO 10545-2	· 5.0%	13.0%
Straightness of Sides	BS EN ISO 10545-2	±0.5%	±0.3%
Rectangularity	BS EN ISO 10545-2	-0.6%	+0.3%
Surface Flatness	BS EN ISO 10545-2	≟0.5%	TO:34P
Water Absorption	BS EN ISO 10545-3	<0.5%	<0.05%
Breaking Strength	BS EN ISO 10545-4	≥1300N	≥1500N
Modulus of Repture	BS EN ISO 10545-4	>35N/mm ⁻	>45N/mm²
Resistance to Deep Abrasion	BS EN ISO 10545-6	≤175mm²	≤150mm³
Linear Thermal Expansion	BS EN ISO 10545-8	≤9X10 ^{ac} C	≤7X10³³℃
Thermal Shock Resistance	BS EN ISO 10545-9	No Visible Defect	No Visible Defect
Frost Resistance	BS EN ISO 10545-12	Frost Proof	Frast Proof
Resistance to Chemicals	BS EN ISO 10545-13	No Visible Effect	No Visible Effect
Resistance to Stains	BS EN ISO 10545-14	Manufacturer to State Class	Stains Removed Min. Class 2
Colour Resistance	BS EN ISO 10545-16	No Damage	No Damage
Colour Resistance to UV Light	DIN 51094	No Change in Color	No Change in Color
Scratch Hardness(MOH's Scale)	EN 101	≥6 MOH's	≥7 MOH's
Surface Quality	BS EN 10545-2	Min. 95%	No Visible Defect
Skid Resistance (Friction co-efficient)	BS EN 10545-17	>0.4	>0.4
Moisture Expansion	=	Nil	Nil

DIMENSION	PIECES	COVERAGE	
600 X 1200 MM	2	1.44 sq. mtr:	